

Field Update Instructions for the Express Lavatory Systems

OBSOLETE

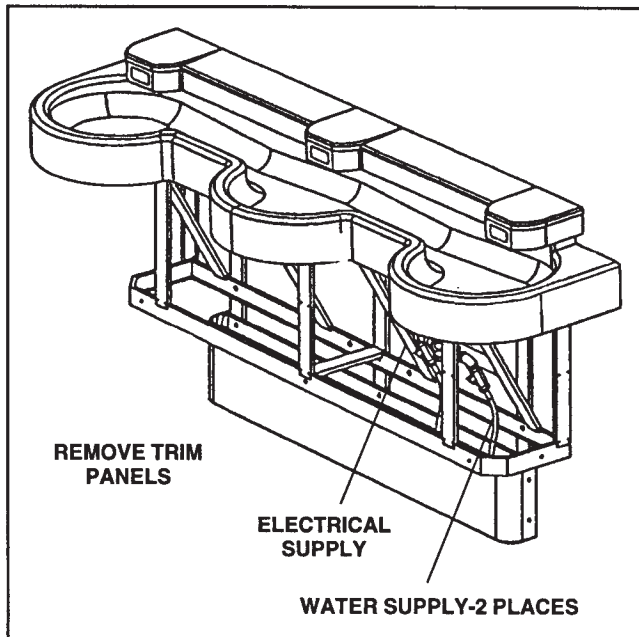


Figure 1

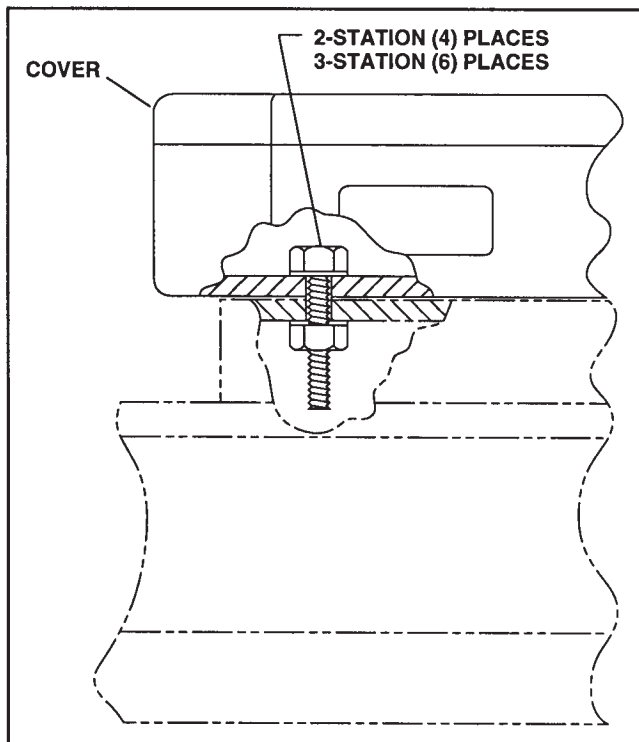


Figure 2

Installation Instructions

To install the Soap Dispensers please follow these instructions.

1. Remove the front trim panels, Figure 1.

WARNING!!! Disconnect the electrical power supply before attempting to remove the sprayhead unit.

2. Shut off water.
3. Disconnect the two (2) power leads coming from sprayhead.
4. Disconnect the flexible supply tubing from the water supply.
5. Locate the attachment bolts, Figure 2.

NOTE: 2 station models have 4 bolts, 3 station models have 6 bolts.

6. Loosen and remove nuts and washer. Save these for reinstallation.
7. Remove the sprayhead unit from the base assembly.
8. Install the soap dispensers following instructions that are enclosed with the dispensers.

Reassembly Instructions

NOTE: The bolts are press fit into the sprayhead unit and should not loosen up. Take caution not to hit or jar these loose.

1. Align the sprayhead unit bolts with the bolt holes on the base assembly and lower into position.
2. Securely reinstall the washers and nuts removed earlier.
3. Reconnect the water supply lines.
4. Reconnect the two (2) power leads going to sprayhead.
5. Reconnect the electrical power supply.
6. Turn on water supply.
7. Test the unit to make sure that all connections are tight and proper.



P.O. Box 309, Menomonee Falls, WI 53052-0309
TEL. 1-800-BRADLEY FAX 262-251-5817
<http://www.bradleycorp.com>