PLUMBING FIXTURES TECHNICAL DATA

BradPack[®] Wash Center Model 1121



- ADA Compliant
- Factory Assembled
- Recesses in 4" Wall Construction
- Concealed Trap

Specifications

Materials

Wash Center is fabricated of type 304 (18-8) stainless steel with exposed surfaces in architectural satin finish. Trim is brass with heavy polished chrome plating.

Construction

Flange

22 gauge stainless steel with one-piece seamless construction, 1 " wide with 1/4 " return.

Cabinet

Heavy-gauge stainless steel, all spot welded construction. One full width shelf.

Towel Dispenser

22 gauge stainless steel with rolled edge dispenser opening. Holds 800 multi-fold or 500 C-fold paper towels.

Bowl

18 gauge stainless steel. Oval design, 13-5/8"L x 10-1/8"W x 5"D.

Trim

Gooseneck spout with aerated nozzle projects 5" above bowl. (Optional non-aerated spout available.) 4" centerset faucet with 4" wristblade handles are mounted on horizontal surface of bowl deck. Free running 1-1/2" bath ell with stainless steel strainer. Trap and stops complying with local codes to be supplied by plumbing contractor.

Apron

22 gauge stainless steel. Spot welded to cabinet and underside of bowl.

Barrier-Free (ADA Compliant)



The BradPack wash center is designed to comply with all ADA guidelines on reaches, clearances, and operation.

Check Your Surroundings

Certain factors, such as intense direct sunlight, other infrared devices, or other site conditions may interfere with the activation of infrared faucets. Contact your local Bradley representative to discuss any application concerns.

Installation

Requires rough wall opening 15-1/2 "W x 44"H x 4"D. Top of opening is 64-1/2" from finished floor. (Detailed installation instructions included with each shipment.)






P.O. Box 309, Menomonee Falls, WI 53052-0309 Phone 1-800-BRADLEY FAX 262-251-5817 http://www.bradleycorp.com

Document No. 6100

This information is subject to change without formal notice. © 2003 Bradley Corporation 5-11-2006 (3 Pages Total)

BradPack[®] Wash Center Model 1121



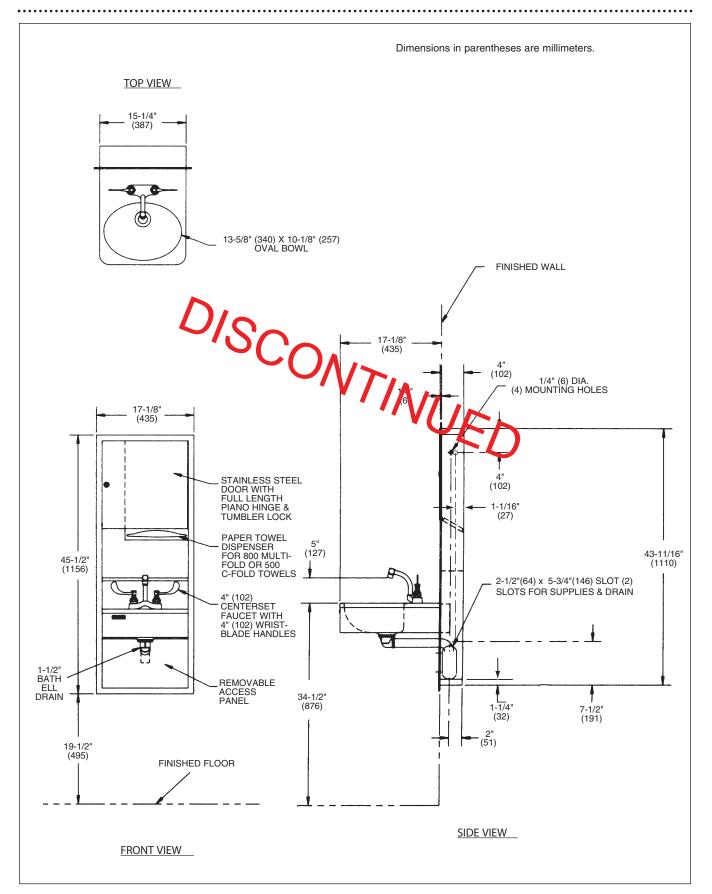

Bradley Corporation reserves the right to make changes in design and material without formal notice and without incurring obligation. Verify all rough-in dimensions prior to installation.

PLUMBING FIXTURES TECHNICAL DATA

BradPack[®] Wash Center Model 1121

MODEL

Model Description

Description BradPack Wash Center

OPTIONAL SELECTIONS

Controls:

- □ W 90-75 Metering Faucet w/thermostatic mixing valve; stop, strainer, and check valves.
- H Futura Faucet 900. Includes: Accu-Zone infrared metering control; thermostatic mixing valve; stop, strainer, and check valves.
- □ 4 Push-button "Handi-Tap" metering valve and thermostatic mixing valve. Includes single piece underbowl cover/access panel.

Soap Dispenser:

□ 5 Deck-mounted liquid soap dispenser, 40 oz.

Installation:

- □ A Surface-mounting collar (4"), factory installed
- □ B Semi-recessed collar for 2" recess, factory installed
- □ N In-wall mounting frame



Sample Specification

ADA compliant preassembled wash center shall be Bradley BradPack Model/1121. UL listed wash center shall be onepiece unit designed corr cersed installation and shall permit convenient use of lavator of both able-bodied and wheelchair users and shall include the following standard equipment:

- hand-controlled lavatory with + wistblade, hot and cold valves
- towel dispenser

Unit shall be fabricated of type 304 (18-8), 22 gauge stainless steel and 18 gauge bowl with exposed surfaces in architectural satin finish. Overall dimensions: 17-1/8"W x 45-1/2"H with 17-1/8" projection from finished wall surface. Trap and stops complying with local codes to be furnished by plumbing contractor.



P.O. Box 309, Menomonee Falls, WI 53052-0309 Phone 1-800-BRADLEY FAX 262-251-5817 http://www.bradleycorp.com

Document No. 6100