

- Meets all applicable ADA height and clearance requirements
- All units factory tested for proper operation

Specifications

Materials

All cabinet materials, including interior piping are Type 304 stainless steel. The fixture is made from heavy gauge stainless steel with seamless welded surfaces.

Construction

Cabinet

All welded construction with exposed welds ground smooth, and all accessible seams and voids eliminated. Bottom of lavatory cabinet is fully enclosed with a seamless welded plate. Backsplash panel has openings punched and sleeved for fittings.

Lavatory

Die-drawn lavatory has multiple hole fast drain with 1-1/4" no-hub elbow waste and air vent. Self-draining soap dishes formed into countertop. Lavatory bowl measures 13-1/4" x 10" x 5" deep. Valve options include self-closing pneumatic metering and electric metering valves.

Finish

All exposed stainless steel surfaces have a bead blast finish. Exposed fitting surfaces are triple-chrome plated (#4 optional).

Wall Anchoring

No exposed mounting fasteners in cell area – fixture is completely secured from pipe chase side, with rustproof mounting hardware to walls up to 12" thick.

Fixture requires wall openings and accessible chase for installation and maintenance. Some field assembly may be required.


Standard product selections contained within this document are third party **CERTIFIED** to NSF/ANSI 372 meeting the Lead-Free content requirement. Any product configured with custom options will be **COMPLIANT** with NSF/ANSI 372 meeting the Lead-Free content requirement.



Certified to NSF/ANSI 372



DISCONTINUED

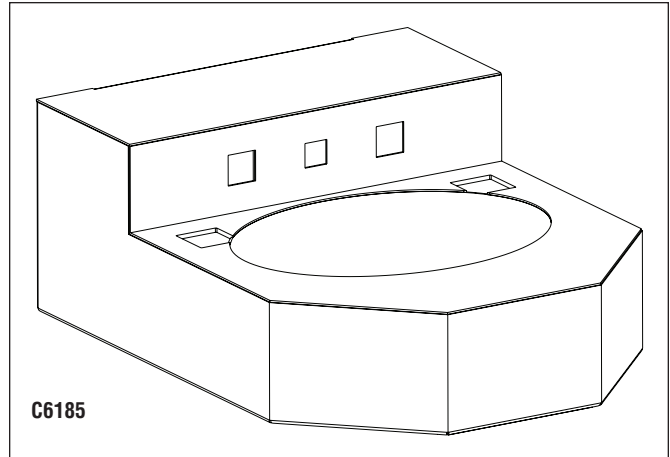

C6185

Model	Description
<input type="checkbox"/> LAV6185	Chase Mounted Barrier-Free 5-Sided Stainless Steel Lav

Required Selections	
Finish (select one):	
<input type="checkbox"/> BB Bead Blast (Standard)	<input type="checkbox"/> PS Polished Stainless Steel
Wall Thickness (select one):	
<input type="checkbox"/> 0-8 0-8" Wall Thickness	<input type="checkbox"/> 4-8 4-8" Wall Thickness
<input type="checkbox"/> 8-12 8-12" Wall Thickness	
Valve (select one OR select a Filler/Bubbler):	
<input type="checkbox"/> ASTS Air Single Temp Self-Closing Valve	
<input type="checkbox"/> ADTS Air Dual Temp Self-Closing Valve	
<input type="checkbox"/> ASTM Air Single Temp Metering Valve	
<input type="checkbox"/> ADTM Air Dual Temp Metering Valve	
<input type="checkbox"/> TTST* TouchTime® Single Temp Electronic Metering Valve	
<input type="checkbox"/> TTD* TouchTime® Dual Temp Electronic Metering Valve	
<input type="checkbox"/> NV No Valve	
Filler/Bubbler (select one):	
<input type="checkbox"/> PF Penal Filler	<input type="checkbox"/> CF Code Filler
<input type="checkbox"/> NF No Filler	
Lavatory Wastes:	
<input type="checkbox"/> EW-NH Elbow Waste - No-Hub (Std)	
<input type="checkbox"/> 1 1/4EW-C 1-1/4" Elbow Waste - Coupling	
<input type="checkbox"/> 1 1/2EW-C 1-1/2" Elbow Waste - Coupling	

Optional Selections	
In-Chase Lavatory Waste Accessories:	
<input type="checkbox"/> 1 1/2PN 1-1/2" P-Trap – No Hub	
Lav Water Supply:	
<input type="checkbox"/> TMA Throstatic Mixing Supply	

