

# **Specifications**

### Material

All cabinet materials, including interior piping are Type 304 stainless steel. The fixture is made from heavy gauge stainless steel with seamless welded surfaces.

### Construction

### **Panel**

Shower panel has beveled edges for tight wall fit. Recessed soap dish, showerheads and push buttons are secured from back of panel for vandal-resistant installation. Stainless steel anchor nuts are welded to back of panel and soap dish to accept 1/4"-20 studs which are rear mounted at top, center and bottom of panel.

### Valving

Two valving options are offered on the unit. Both valving types are chase located and feature two valves — one for the upper fixed showerhead and one for the lower fixed showerhead. They are:

- Single-temperature air pushbutton with 5 to 60 second timing cycle adjustable from chase side only.
- TouchTime pushbutton and piezo switch are factory set at 60 second timing.

### **Showerheads**

Bradley "SX15" severe service 1.5 GPM (5.7 LPM) showerheads have a fixed direction spray. Spray pattern is adjustable through orifice with 1/8" Allen wrench.

### **Finish**

All exposed stainless steel surfaces have a beadblast finish. Polished #4 satin finish optional. Brass showerheads and push buttons are triple chrome-plated.

# **Wall Anchoring**


No exposed mounting fasteners in cell area. Fixture is completely secured from pipe chase side with rust-resistant mounting hardware for walls up to 12" thick.



Fixture requires wall openings and accessible chase for installation and maintenance. Some field assembly may be required.

# **Standard Equipment**

Unitized stainless shower panel with two "SX15" showerheads, recessed soap dish, choice of valves, and rust-resistant hardware for walls up to 12" thick.

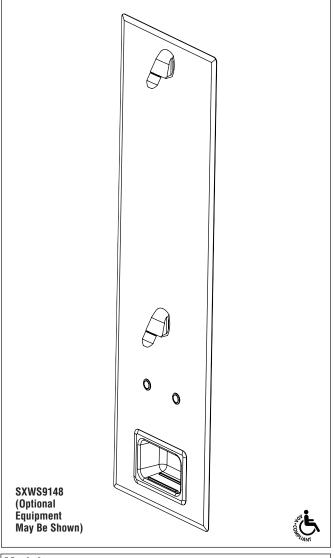

# Model SXWS9148 Chase-Mounted Two-Head SX Panel Shower Standard Selections Valve Type (select one): ASTM Air Pushbutton TTPA TouchTime Pushbutton\* TTPB TouchTime Piezo Switch\*

<sup>\*</sup> TTPA and TTBA valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.

(mm)



Dashed Lines Indicate Wall Opening

Dashed Lines Indicate Wall Opening

Push Button for Lower Fixed Showerhead

Push Button for Upper Fixed Showerhead

Push Button for Upper Fixed Showerhead

(229)

13" (330)

# Model SXWS9148 (Air Pushbutton)

43" (1105)


> 33-11/16" (856)

# Plastic Supply Tubing 3/8" (10) NPT Female Fitting

### Page 2 of 2 11/7/2017 This information is subject to change without notice. Bradley\_SecurityShower\_SXWS9148

Plastic Air Line Tubing

# Model SXWS9148 (TouchTime)



P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com