



- 14 gauge panel construction
- Removable hand shower
- Available with TouchTime® or air pushbutton
- All units factory tested for proper operation

Specifications

Material

All cabinet materials, including interior piping are Type 304 stainless steel. The fixture is made from heavy gauge stainless steel with seamless welded surfaces.

Construction

Panel

Shower panel has beveled edges for tight wall fit. Recessed soap dish, showerhead, and push button are secured from back of panel for vandal-resistant installation. Hose assembly with vacuum breaker has quick disconnect for removal and storage when not in use. Stainless steel anchor nuts are welded to back of panel and soap dish to accept 1/4" - 20 studs which are rear mounted at top, center, and bottom of panel.

Valving

Two valving options are offered on the unit. Both valving types are chase located and feature two valves – one for the upper fixed showerhead and one for the hand shower hose assembly. They are:

- Single temperature air pushbutton with 5 to 60 second timing cycle adjustable from chase side only.
- TouchTime pushbutton and piezo switch are factory set at 60 second timing.

Showerhead

Bradley "SX15" severe service 1.5 GPM (5.7 LPM) showerhead has a fixed direction spray. Spray pattern is adjustable through orifice with 1/8" Allen wrench.

Hand Shower

Hose assembly has supply elbow, quick disconnect, vacuum breaker, 60" hose, hook with eye, and hand-held showerhead.

Finish

All exposed stainless steel surfaces have a #4 polished satin finish. Brass showerhead and push buttons are triple chrome plated.

Wall Anchoring


No exposed mounting fasteners in cell area. Fixture is completely secured from pipe chase side with rust-resistant mounting hardware for walls up to 12" thick.



Fixture requires wall openings and accessible chase for installation and maintenance. Some field assembly may be required.

Standard Equipment

Unitized stainless shower panel with "SX15" showerhead, complete hose assembly for use by the handicapped, recessed soap dish, choice of valves, and rust resistant hardware for walls up to 12" thick.

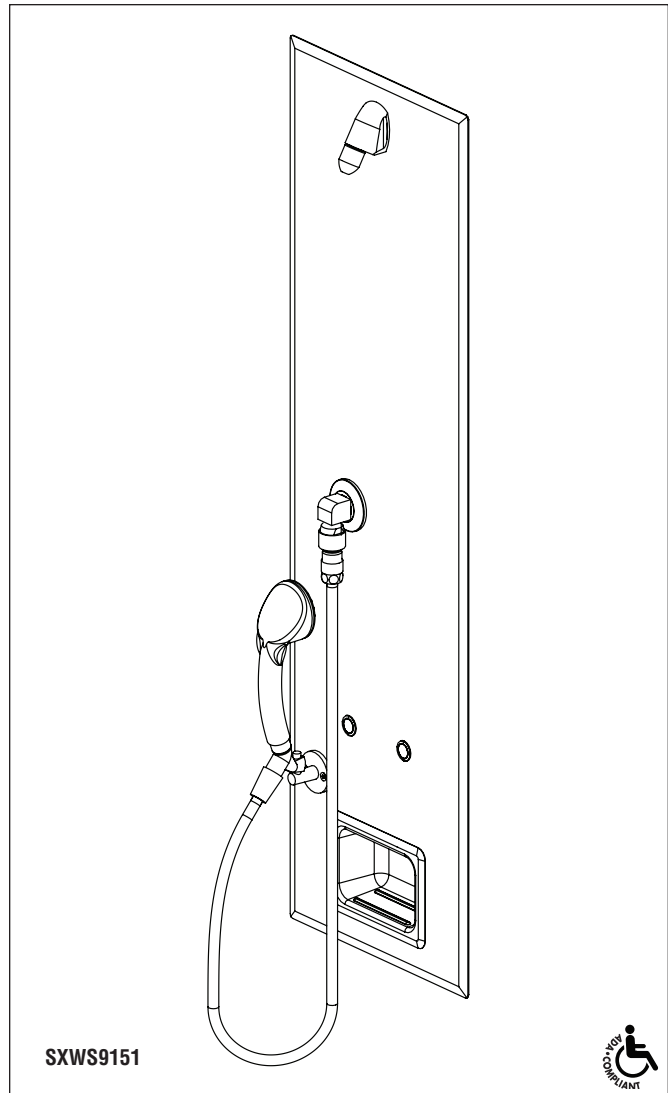

SXWS9151

Models

- SXWS9151** Chase-Mounted Handicap SX Shower Panel

Standard Selections

Valve Type (select one):

- ASTM** Air Pushbutton
- TTPA** TouchTime Pushbutton*
- TTPB** TouchTime Piezo Switch*

* TTPA and TTBA valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.



SXWS9151 Chase-Mounted Handicap SX Panel Shower

Model C9151

(mm)

