



SXWS9157FM Front-Mounted Handicap SX Panel Shower

- 14 gauge panel construction
- Removable hand shower
- Available with TouchTime® or air pushbutton
- All units factory tested for proper operation

Specifications

Material

All cabinet materials, including interior piping are Type 304 stainless steel. The fixture is made from heavy gauge stainless steel with seamless welded surfaces.

Panel

Shower panel has beveled edges for tight wall fit. Recessed soap dish, showerhead, and push button are secured from back of panel for vandal-resistant installation. Hand Shower hose assembly with vacuum breaker has quick disconnect for removal and storage when not in use. Vandal-resistant, stainless steel screws are used to anchor panel to wall frame at ten points.

Valving

Two valving options are offered on the unit. Both valving types are accessible from the front for maintenance and feature two valves – one for the upper fixed showerhead and one for the hand shower hose assembly. They are:

- Single-temperature air pushbutton with 5 to 60 second timing cycle adjustable from chase side only.
- TouchTime pushbutton and piezo switch are factory set at 60 second timing.

Showerhead

Bradley "SX15" severe service 1.5 GPM (5.7 LPM) showerhead has a fixed direction spray. Spray pattern is adjustable through orifice with 1/8" Allen wrench.

Hand Shower

Hose assembly has supply elbow, quick disconnect, vacuum breaker, 60" hose, hook with eye, and hand-held showerhead.

Finish

All exposed stainless steel surfaces have a #4 polished satin finish. Brass showerhead and push buttons are triple chrome plated.

Wall Anchoring


Mounting frame has pre-drilled holes to assist in locating wall anchors. Suitable wall anchors and screws to be furnished by contractor. Access panels are attached to shower with vandal and rust resistant screws.



Fixture requires wall cut out for installation and maintenance. Some field assembly is required.

Standard Equipment

Unitized stainless shower panel with mounting frame, "SX15" showerhead, complete hose assembly for use by the handicapped, recessed soap dish and choice of valves.

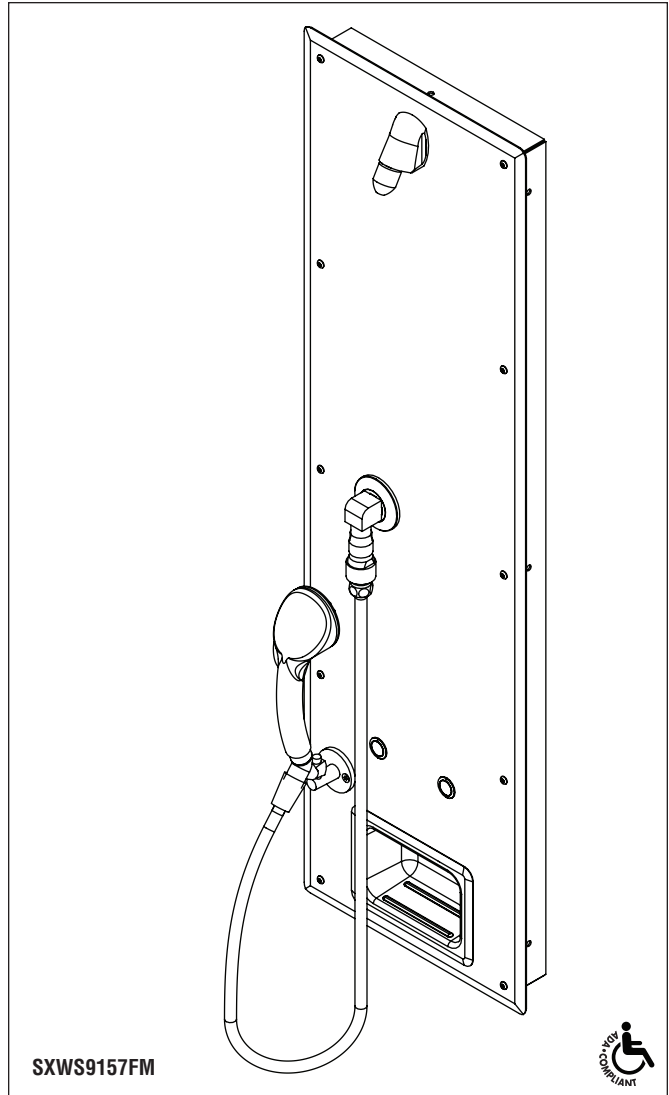

SXWS9157FM



Model

SXWS9157FM Front-Mounted Handicap SX Panel Shower

Standard Selections

Valve Type (select one):

- ASTM** Air Pushbutton
- TTPA** TouchTime Pushbutton*
- TTPB** TouchTime Piezo Switch*

* TTPA and TTPB valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.



SXWS9157FM Front-Mounted Handicap SX Panel Shower

Model SXWS9157FM

(mm)

