



# HN300 ADA Compliant In-Wall Shower

## Specifications

### Shower Configuration

Ability to install as right or left-handed configurations as determined by application or ADA requirements.

## Construction

### Materials

All exposed materials, except for phenolic seat, are type 304 stainless steel or polished chrome-plated brass. Valve bodies are brass casting. Grab bar is 18 gauge.

## ADA Compliant

When installed properly in a 3' x 3' stall (supplied by others), the HN300 provides a shower stall designed to comply with all known ADA guidelines on reaches, clearances, and operation. Controls are mounted 38"– 48" above the floor to accommodate all users.



Check local applicable codes for dimensional compliance.

## Standard Equipment

### Valve Type as Selected

For more information on each valve type, please enter the model number in the search box at [www.bradleycorp.com](http://www.bradleycorp.com).

### Showerhead

Standard fixed direction adjustable sprayhead (S15).

### Diverter Valve

Lever handle operation for easy transfer of water flow between fixed and hand-held shower spray.

### Flow Control

A 1.5 GPM (5.7 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.0 GPM (7.6 LPM) max.

## Optional Selections

### Hand Shower

Consisting of hand shower with on-off control, a 60" stainless steel flexible hose and post style mounting bracket to hold to wall. Elevated in-line backflow preventer with quick-disconnect for flexible hose available with some models. For more information on each hand shower type, please reference the Hand Showers tech data at [www.bradleycorp.com](http://www.bradleycorp.com).

### Barrier-Free Seat

Reversible phenolic shower seat. Load capacity of 250 lbs. See technical data document Bradley\_ShowerSeat\_9569 for additional information.

### Showerhead Anchor Plate

3/16" cadmium-plated steel plate furnished with countersunk mounting holes and machine screws provides additional mounting strength.

### Showerhead Back Plate


3/16" cadmium-plated steel plate furnished with couplings, studs and nuts allows most secure anchorage of wall-mounted components.

### Shower Curtain

60" x 72" vinyl shower curtain with heavy-duty curtain rod and hooks.

### L-Shaped 2-Wall Grab Bar

Grab bar fabricated of 18 gauge 1-1/2" O.D. stainless steel tubing with a 1-1/2" safety statute clearance. Flanges are 11 gauge. Load capacity in excess of 300 lbs.

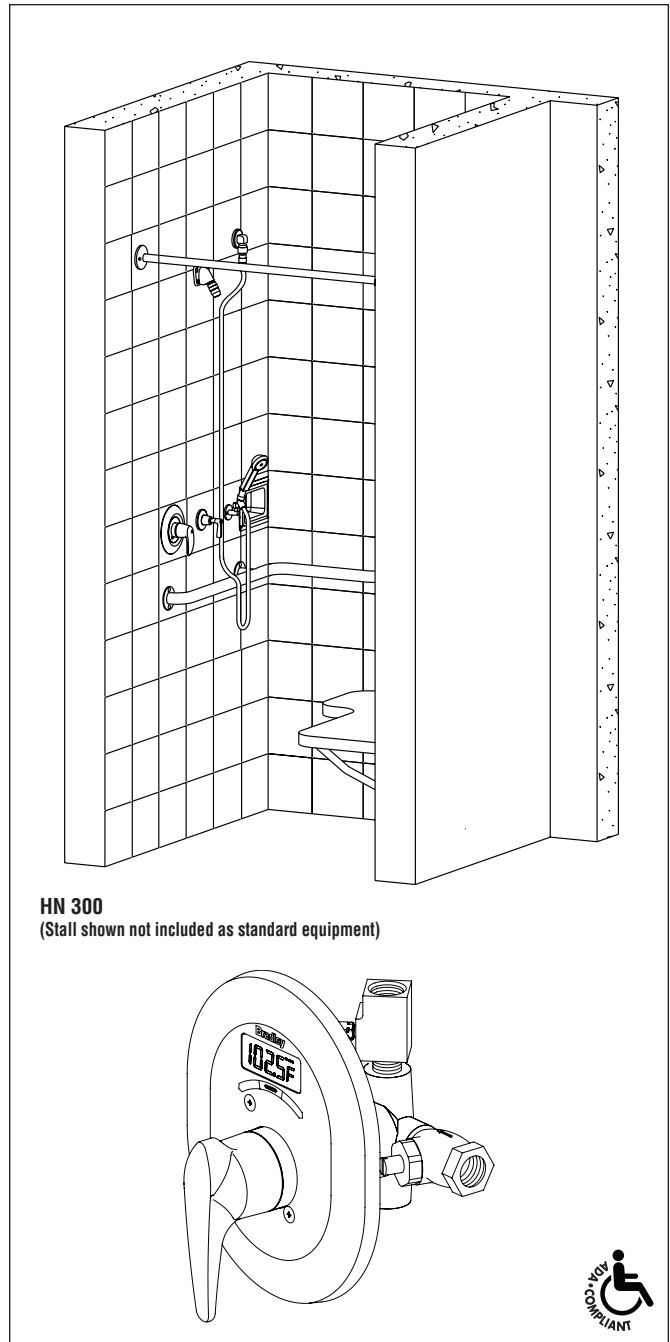



<b>Model</b> <input type="checkbox"/> HN300	<b>Description</b> ADA-Compliant In-Wall Shower
--	--

<b>Standard Selections</b> (Must select one from each category)	
<b>Valve Type (select one):</b>	
<input type="checkbox"/> <b>EF</b>	Equa Flo Pressure Balancing Valve
<input type="checkbox"/> <b>EFT1</b>	Equa Flo Pressure Balancing Valve with Temperature Display
<input type="checkbox"/> <b>HD</b>	Equa Flo HD Pressure Balancing Valve
<input type="checkbox"/> <b>HDT1</b>	Equa Flo HD Pressure Balancing Valve with Temperature Display
<input type="checkbox"/> <b>TMV</b>	Thermostatic Mixing Valve
<input type="checkbox"/> <b>TMVT1</b>	Thermostatic Mixing Valve with Temperature Display
<input type="checkbox"/> <b>SVL</b>	Single Compression Valve with Lever Handle
<input type="checkbox"/> <b>AST</b>	Air Pushbutton
<input type="checkbox"/> <b>TTPA</b>	TouchTime Pushbutton*
<input type="checkbox"/> <b>TTPB</b>	TouchTime Piezo Switch*

<b>Showerhead Type (select one):</b>	
<input type="checkbox"/> <b>S15</b>	Standard Showerhead (Flow Rate = 1.5 GPM/5.7 LPM)
<input type="checkbox"/> <b>SX15</b>	Severe Service Showerhead (Flow Rate = 1.5 GPM/5.7 LPM)
<input type="checkbox"/> <b>S20</b>	Standard Showerhead (Flow Rate = 2.0 GPM/7.6 LPM)
<input type="checkbox"/> <b>SX20</b>	Severe Service Showerhead (Flow Rate = 2.0 GPM/7.6 LPM)
<input type="checkbox"/> <b>SF</b>	Deluxe Showerhead w/ Ball Joint (Flow Rate = 1.5 GPM/5.7 LPM)
<input type="checkbox"/> <b>ES</b>	Economy Soft Flow w/ Ball Joint (Flow Rate = 2.0 GPM/7.6 LPM)
<input type="checkbox"/> <b>J</b>	Multi-Jet Showerhead w/ Ball Joint (Flow Rate = 1.5GPM/5.7 LPM)
<input type="checkbox"/> <b>LX</b>	Luxury Showerhead w/ Ball Joint (Flow Rate = 1.5GPM/5.7 LPM)
<input type="checkbox"/> <b>B</b>	Axis Showerhead w/ Ball Joint (Flow Rate = 1.5GPM/5.7 LPM)

\*TTPA and TTPB valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.

\*\* All hand showers are 1.5GPM (95.7LPM) and must be installed per ADA requirements.

§ Only available with wall arm showerheads.

† Included with EF, EFT1, HD, HDT1, TMV and TMVT1 valves.

‡ Only available on S15 and S20 showerheads.

Verify all rough-in dimensions prior to installation.

Consult local and national codes; conformity and compliance to local and national codes is the responsibility of the installer.

**Optional Selections** (Must select one from each category)

<b>Volume Control Type‡ (select one):</b>	
<input type="checkbox"/> <b>AKV</b>	Allen Key Volume Control
<input type="checkbox"/> <b>LHV</b>	Lever Handle Volume Control
<input type="checkbox"/> <b>NONE</b>	No Volume Control

<b>Ball Joint Type‡ (select one):</b>	
<input type="checkbox"/> <b>LBJ</b>	Lockable Ball Joint
<input type="checkbox"/> <b>NONE</b>	No Ball Joint

<b>Supply Stop Type† (select one):</b>	
<input type="checkbox"/> <b>ST</b>	Stops in each Supply
<input type="checkbox"/> <b>NONE</b>	No Supply Stops

<b>Hand Shower Type** (select one):</b>	
<input type="checkbox"/> <b>A24</b>	With 60" flexible hose, 24" ADA Grab Bar and Vacuum Breaker
<input type="checkbox"/> <b>A36</b>	With 60" flexible hose, 36" ADA Grab Bar and Vacuum Breaker
<input type="checkbox"/> <b>B24</b>	With 60" Flexible Hose, 24" Metal Slide Bar and Vacuum Breaker
<input type="checkbox"/> <b>B30</b>	With 60" flexible hose, 30" Slide Bar
<input type="checkbox"/> <b>E24</b>	With 60" Flexible Hose, 22" Economy Slide Bar and Vacuum Breaker
<input type="checkbox"/> <b>HW</b>	With 60" Flexible Hose, Wall Hooks and Vacuum Breaker
<input type="checkbox"/> <b>HS</b>	With 60" Flexible Hose, Wall Hooks, Vacuum Breaker and Quick Disconnect
<input type="checkbox"/> <b>SB</b>	With 60" Flexible Hose, 24" Metal Slide Bar, Vacuum Breaker and Quick Disconnect
<input type="checkbox"/> <b>SB-30</b>	With 60" flexible hose, 30" Slide Bar and Quick Disconnect
<input type="checkbox"/> <b>NONE</b>	No Hand Shower

<b>Shower Seat Type (select one):</b>	
<input type="checkbox"/> <b>RSS</b>	Reversible Phenolic Shower Seat
<input type="checkbox"/> <b>NS</b>	No Seat

<b>Soap Dish Type (select one):</b>	
<input type="checkbox"/> <b>SD</b>	Wall-Mount Soap Dish
<input type="checkbox"/> <b>RSD</b>	Recessed Soap Dish
<input type="checkbox"/> <b>NONE</b>	No Soap Dish

<b>Showerhead Anchor Plate Type (select one):</b>	
<input type="checkbox"/> <b>AP</b>	Anchor Plate for Showerhead §
<input type="checkbox"/> <b>NONE</b>	No Anchor Plate for Showerhead §

<b>Showerhead Back Plate Type (select one):</b>	
<input type="checkbox"/> <b>BP</b>	Back Plate for Showerhead §
<input type="checkbox"/> <b>NONE</b>	No Back Plate for Showerhead §

<b>Curtain Type (select one):</b>	
<input type="checkbox"/> <b>CRH</b>	Shower Curtain, Rod and Hooks
<input type="checkbox"/> <b>NONE</b>	No Shower Curtain, Rod or Hooks

<b>Grab Bar Type (select one):</b>	
<input type="checkbox"/> <b>GB</b>	L-Shaped 2-Wall Grab Bar
<input type="checkbox"/> <b>NONE</b>	No Grab Bar

