



HSC91 SafeCare™ Two-Head Panel Shower

- Ligature-Resistant Design
- Hemispherical Air Pushbutton
- TouchTime® Pushbutton and Piezo Switch Flush with Panel
- Ligature Resistant Showerhead
- All Units Factory Tested for Proper Operation

Construction

Panel

Shower panel is heavy gauge type 304 stainless steel and has beveled edges for tight wall fit. Recessed soap dish, showerheads and push buttons are secured from back of panel. Stainless steel security screws are used to anchor panel to mounting frame at 10 points.

Valve Options

- Single-temperature air pushbutton with 5 to 60 second timing cycle adjustable from chase side only.
- TouchTime pushbutton and piezo switch are factory set at 60 second timing.

Showerhead

Showerhead is designed to reduce ligature points. Polished chrome-plated solid brass showerhead is adjustable fro 25 or 30 degree spray angle. Flow rate is 2.0 GPM at 80 PSI to meet ASME A112.18.1M and CAS B125. 1/2" NPTF inlet. Showerhead is mounted with security pin screws.

Finish

All exposed stainless steel surfaces shall have a polished #4 satin finish. Pushbuttons are type 304 stainless steel.

Wall Anchoring

Mounting frame has pre-drilled holes to assist in locating wall anchors. Suitable wall anchors and screws to be furnished by contractor.

Standard Equipment

Unitized stainless shower panel with mounting frame, two showerheads, recessed soap dish, choice of valves, and rust-resistant hardware.



**HSC91
(Optional
Equipment
May Be Shown)**



Non-cancelable, non-returnable

Models

- HSC91** Front-Mounted Two-Head Panel Shower

Standard Selections

Valve Type (select one):

- ASTM** Air Pushbutton
 TTPA TouchTime Pushbutton*
 TTPB TouchTime Piezo Switch*

* TTPA and TTBA valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.




HSC91 SafeCare™ Two-Head Panel Shower


(mm)

Dimensions

Minimum Wall Depth:
 Frame Only = 2.0" (51)
 Air = 4-1/2" (114)
 TouchTime = 3.0" (76)

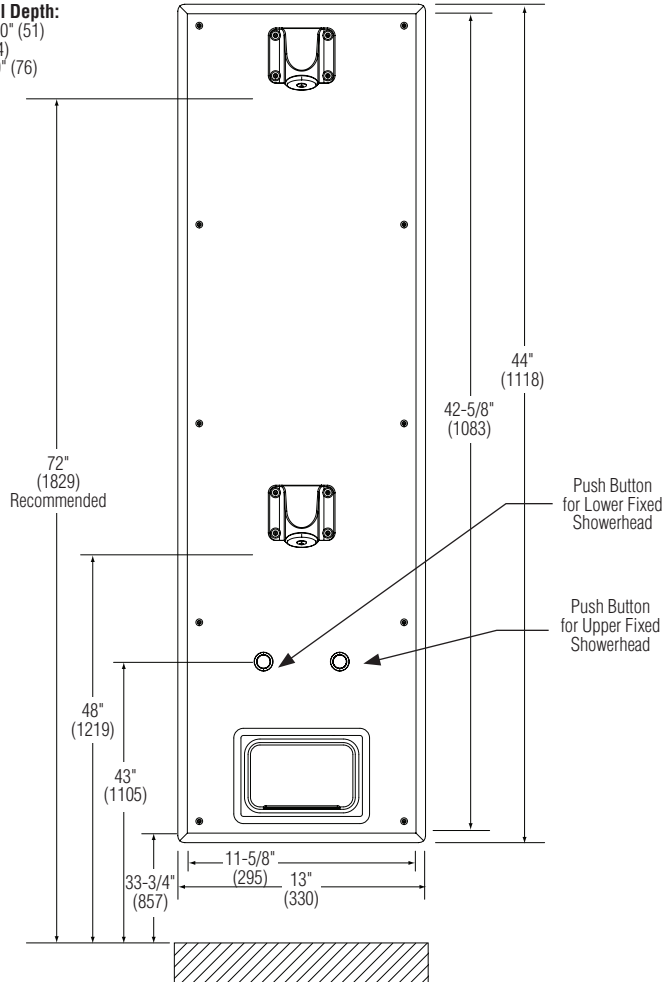

Air Valve-Single

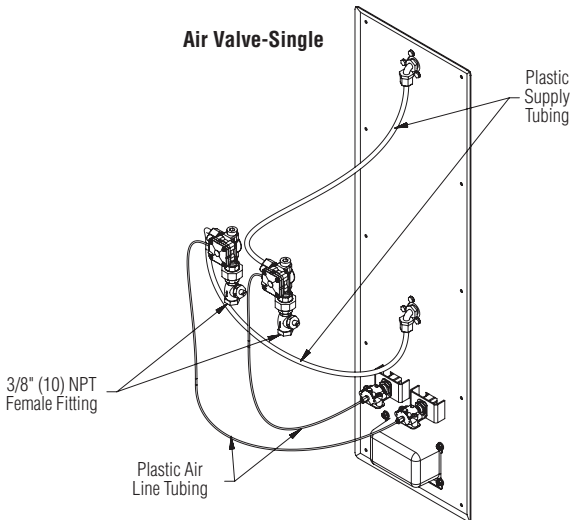

TouchTime-Single

