



## WS-1WCA-BF Individual Coverall Barrier-Free Wall Shower

- Quick, Easy Installation
- Completely Preassembled Wall Shower Unit
- Ideal for Barrier-Free Shower Rooms

### Specifications

#### Materials

Shower panel is type 304 stainless steel. All other exposed parts are stainless steel or chrome-plated brass. Valve bodies are brass casting. Supply inlets are flexible stainless steel hoses.

### Standard Equipment

#### Shower Panel

Constructed of 18 gauge stainless steel with stainless steel soap tray mounted to panel. Shower panel top and bottom covers are sloped, and constructed of 16 gauge stainless steel.

#### Valve Type as Selected

For more information on each valve type, please enter the model number in the search box at [www.bradleycorp.com](http://www.bradleycorp.com).

#### Flow Control

A 1.5 GPM (5.7 LPM) flow control is standard. Actual flow may vary, but will not exceed 2.0 GPM (7.6 LPM) max.

#### Supply Inlets

Supply inlets are 24" flexible, stainless steel hoses with 1/2" NPT connections. Inlets are accessible through the back of the shower or through knockouts in the top and bottom covers.

#### Hand Shower

Consisting of hand shower with on-off control, a 60" stainless steel flexible hose and post style mounting brackets to hold to shower panel. Elevated in-line backflow preventer with quick-disconnect for flexible hose.

### ADA Requirements



*This shower complies with most, but not all, ADA dimensional requirements. Check local codes prior to installation. For ADA compliance use the WS-1WCA-ADA model.*

#### Standard Selections (Must select one)

##### Showerhead Height (select one)

- ☐ **6'-0"** Standard Height
- ☐ **5'-6"** Juvenile Height

##### Valve Type (select one)

###### Hot/Tempered and Cold Supplies

- ☐ **EF** Equa-Flo Pressure Balancing Valve
- ☐ **HD** Equa-Flo HD Pressure Balancing Valve
- ☐ **TMV** Thermostatic Mixing Valve

###### Single Tempered/Cold Supply

- ☐ **AST** Air Pushbutton
- ☐ **SVL** Single Compression Valve with Lever Handle
- ☐ **TTPA** TouchTime Pushbutton\*\*
- ☐ **TTPB** TouchTime Piezo Switch\*\*



WS-1WCA-BF

### Optional Selections

#### Supply Stop Type (select one) (included with EF, HD and TMV valves)

- ☐ **ST** Stops in Supplies
- ☐ **NONE** No Supply Stops

#### Shower Seat Type (select one)

- ☐ **RSS** Reversible Phenolic Shower Seat (Not a Transfer Seat)
- ☐ **NONE** No Shower Seat

#### Grab Bar Type (select one)

- ☐ **GB1** Grab Bar - 24" Straight
- ☐ **GB2** Grab Bar - 2-Wall
- ☐ **NONE** No Grab Bar

#### Slide Bar Type (select one)

- ☐ **SB** 24" Slide Bar
- ☐ **NONE** No Slide Bar

#### Soap Type (select one)

- ☐ **SD** Standard Soap Dish
- ☐ **RSD** Recessed Soap Dish
- ☐ **NSD** No Soap Dish

#### Shroud Type

- ☐ **SHV** Vertical Shrouds (floor to ceiling height \_\_\_\_\_ ft. \_\_\_\_\_ in.)\*
- ☐ **SHH** Horizontal Shroud (per 3' section)\*†
- ☐ **NONE** No Shroud

#### Hardware Type (select one)

- ☐ **SC** Standard Screws
- ☐ **VS** Vandal Resistant Screws

\*Non-cancelable, non-returnable

\*\*TTPA and TTPB valves require a low-voltage UL/CSA listed 120VAC/12VDC plug-in adapter.

† Submittal drawing required.

Verify all rough-in dimensions prior to installation.

Consult local and national codes: conformity and compliance to local and national codes is the responsibility of the installer.

2.5 GPM showerhead flow rate does not meet California Energy Commission 20 CCR T.20, Div. 2, 1601-1609.


© 2017 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309  
800 BRADLEY (800 272 3539) +1 262 251 6000  
[bradleycorp.com](http://bradleycorp.com)



# WS-1WCA-BF Individual Coverall Barrier-Free Wall Shower

Dimensions for Shower

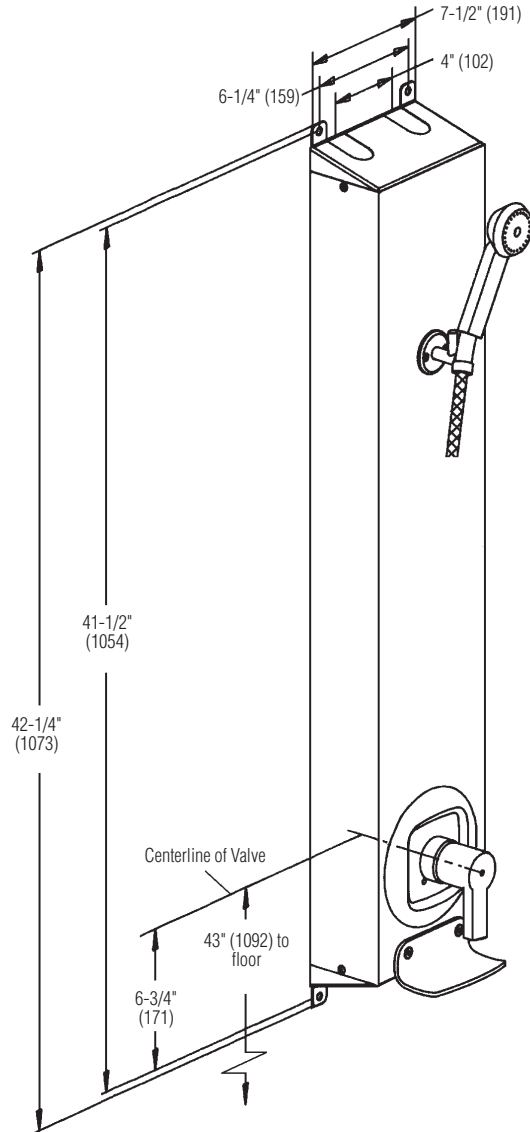

Dimensions for Shower with  
Optional Vertical Shroud

(mm)

