



# S19-120P

## Drench Shower w/Hose Spray and Horizontal Supply


- Exceeds American National Standard Z358.1 Specifications
- Easily Mounts to Wall
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1

### Specifications

Impact-resistant plastic showerhead is colored bright yellow for high visibility in emergency situations. Shower provides a superior washdown with a more even spray pattern. Shower pull rod is stainless steel. Galvanized steel piping is additionally protected with BradTect® safety yellow coating. Hand-held hose sprayhead contains an antimicrobial agent to protect the sprayhead.


- Installer to supply backflow prevention as required by UPC, IPC and/ or local plumbing coded. Contact Bradley or visit [bradleycorp.com](http://bradleycorp.com) for available options.*
- Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"-96" from the lower edge of the showerhead or shroud to the floor.*
- This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*

| Model                             | Description   |
|-----------------------------------|---|
| <input type="checkbox"/> S19-120P | Drench Shower w/Hose Spray and Horizontal Supply      |
| <input type="checkbox"/> S19-2150 | Navigator EFX20 - Emergency Thermostatic Mixing Valve |

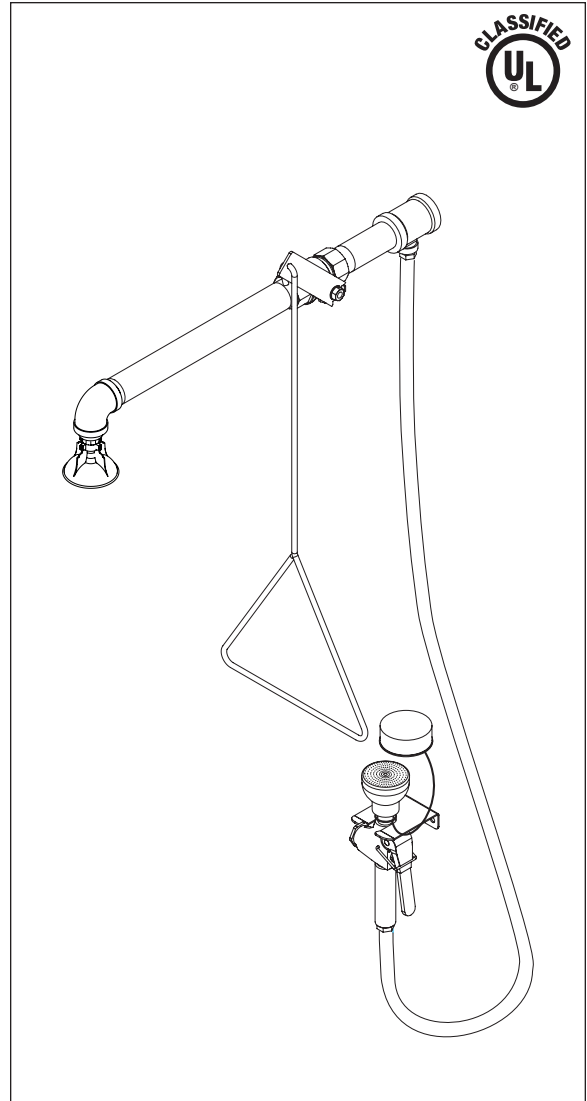


**Tepid Water Options**

[Navigator S19-2150 EFX20  
Emergency Thermostatic Mixing Valve](#)



[Keltech SNA-Series  
Tankless Water Heater](#)



**NAVIGATOR**

Satisfies ANSI/ISEA Z358.1 tepid water requirements.




# S19-120P

## Drench Shower w/Hose Spray and Horizontal Supply

### Standard Equipment

#### SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

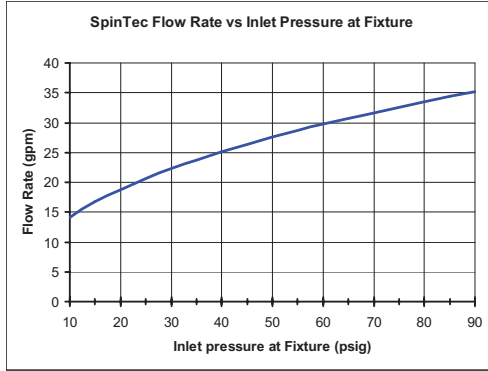

#### Valve

Chrome-plated brass 1" NPT stay-open valve. Operated by a stainless steel pull rod with triangular handle.

#### 8' Hand-Held Hose Spray

The hose spray attachment acts as a face and/or body rinser. Valve remains open once handle is squeezed. Hose is 8' yellow reinforced thermoplastic with 450 PSI burst strength.

#### Pipe and Fittings

Galvanized steel with BradTect® safety yellow coating.

#### Water Supply

1" NPT Horizontal.

