


Installation

WC7455

Chase-Mounted Floor Outlet Siphon Jet
Stainless Steel Toilet

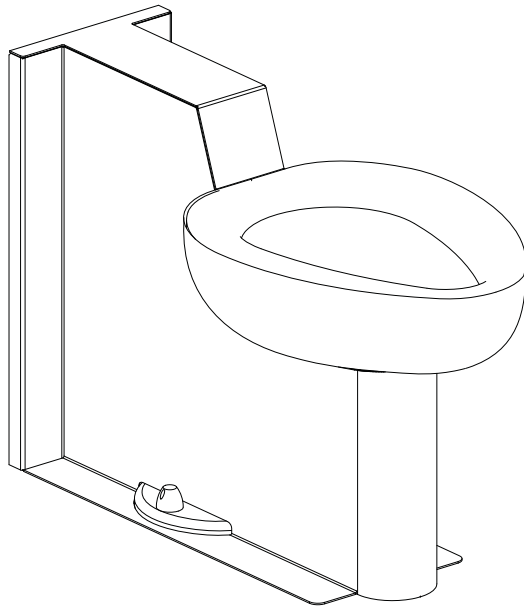

Dimensions.....	2
Rough-In Information.....	2
Installation	2
Cleaning Stainless Steel.....	3

Supplies Required:

- Two 5/16"-18 x 2" closet bolts suitable for floor construction
- 1-1/2" NPT supply piping to flush valve
- Waste connection and toilet gasket




IMPORTANT!



Read this entire installation manual to ensure proper installation. When finished with the installation, file this manual with the owner or maintenance department. Compliance and conformity to local codes and ordinances is the responsibility of the installer.



Separate parts from packaging and make sure all parts are accounted for before discarding packaging material. If any parts are missing, do not begin installation until you obtain the missing parts.





Make sure that all water supply lines have been flushed and then completely turned off before beginning installation. Debris in supply lines can cause valves to malfunction.



Product warranties may be found under "Products" on our web site at bradleycorp.com.




Dimensional Information (mm)

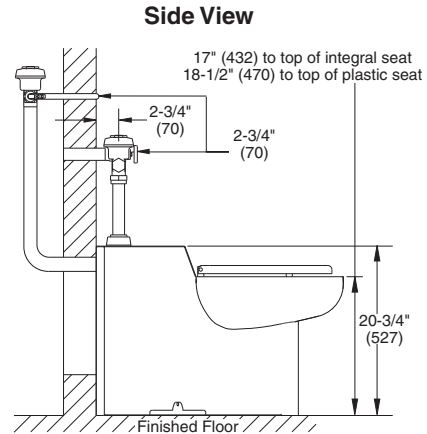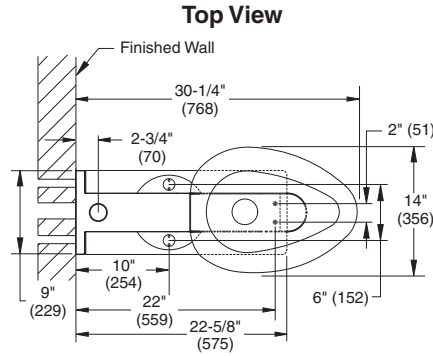

Rough-In Information

Standard Height (View is From Fixture Side)

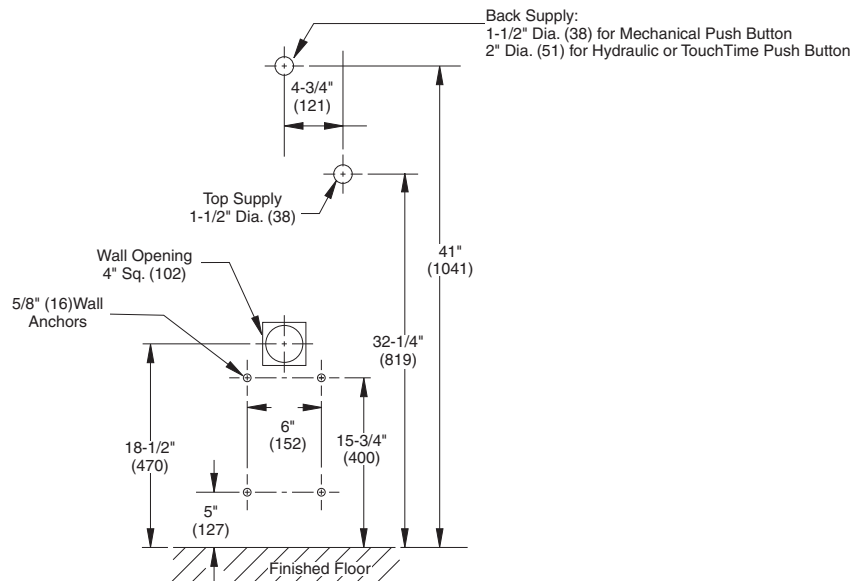

Installation

A Insert four 1/2"-13 threaded studs into back of unit and screw in approx. 1/2".

B Insert two 5/16"-18 x 2" closet bolts (supplied by installer) through closet waste flange.

C Fasten the mounting clip (140-357) over front brace with the screws (160-125) and lockwashers (142-002CF) provided.

D Slide the studs and pipe through the wall openings and position the unit into place. Position the waste gasket into the floor drain and secure unit to wall and floor using nuts, washers and brackets provided. Fasteners must be securely tightened to 60 ft. lbs. torque.

E Connect the 1-1/2" inlet coupling to the unit. (Back Supply shown. For top supply, connect inlet to 1-1/2" flush valve per manufacturer's instructions.)

Threaded Stud Qty. 4
 0"-4" (109-039)
 4"-8" (109-040)
 8"-12" (109-048)

Anchor Bracket Qty. 2 (140-278)

Nut Qty. 4 (110-119)

Washer Qty. 4 (142-0002AM)

Mounting Clip (140-357)

Screws (160-125)

Lockwashers (142-002CF)

Closet Flange Nut Qty. 2 (110-147)

Cleaning Stainless Steel

Material Description: Stainless steel is extremely durable, and maintenance is simple and inexpensive. Proper care, particularly under corrosive conditions, is essential. Always start with the simplest solution and work your way toward the more complicated.

Routine cleaning: Daily or as often as needed use a solution of warm water and soap, detergent, or ammonia. Apply the cleaning solution per the manufactures instructions and always use a soft cloth or sponge to avoid damaging the finish.

Stubborn Stains: To remove stains from stainless steel use a stainless steel cleaner and polish such as Ball® stainless steel cleaner or a soft abrasive. Always follow the manufactures instructions and apply in the same direction as the polish lines.



Never use ordinary steel wool or steel brushes on stainless steel. Always use stainless steel wool or stainless steel brushes.

Special Situations for Material

Fingerprints and Smears: To remove fingerprints or smears use a high quality stainless steel cleaner and polish in accordance with the manufactures instructions. Many of these products leave a protective coating the helps prevent future smears and fingerprints.

Grease and Oil: To remove grease and oil use a quality commercial detergent or caustic cleaner. Apply in accordance to the manufactures instructions and in the direction of the polish lines.

Precautions: Avoid prolonged contact with chlorides (bleaches, salts), bromides (sanitizing agents), thiocyanates (pesticides, photography chemicals, and some foods), and iodides on stainless steel equipment, especially if acid conditions exist.



Do not permit salty solutions to dry and evaporate on stainless steel.

The appearance of rust streaks on stainless steel leads to the belief that the stainless steel is rusting. Look for the actual source of the rust in some iron or steel particles which may be touching, but not actually a part of the stainless steel structure.



Strongly acidic or caustic cleaners may attack the steel causing a reddish film to appear. The use of these cleaners should be avoided.

Brand Names: Use of brand names is intended only to indicate a type of cleaner. This does not constitute an endorsement, nor does the omission of any brand name cleaner imply its inadequacy. Many products named are regional in distribution, and can be found in local supermarkets, department and hardware stores, or through your cleaning service. It is emphasized that all products should be used in strict accordance with package instructions.