


Installation

Phenolic Restroom Partitions, Ceiling-Hung — Series 600

Table of Contents

Pre-Installation Information	2-3
Layout Dimensions for Brackets	4
Mounting Brackets to Wall	5-6
Leveling Brackets to Pilasters	6
Mounting Brackets to Pilasters	7-8
Pilaster Mounting Hardware	9
Pilasters and Panels	10-12
Wall Hung Pilasters	13-15
Pilaster Shoes and Cross Bracing	16
Hinges	17-19
Door Hardware	20-21
Urinal Screens	22-24

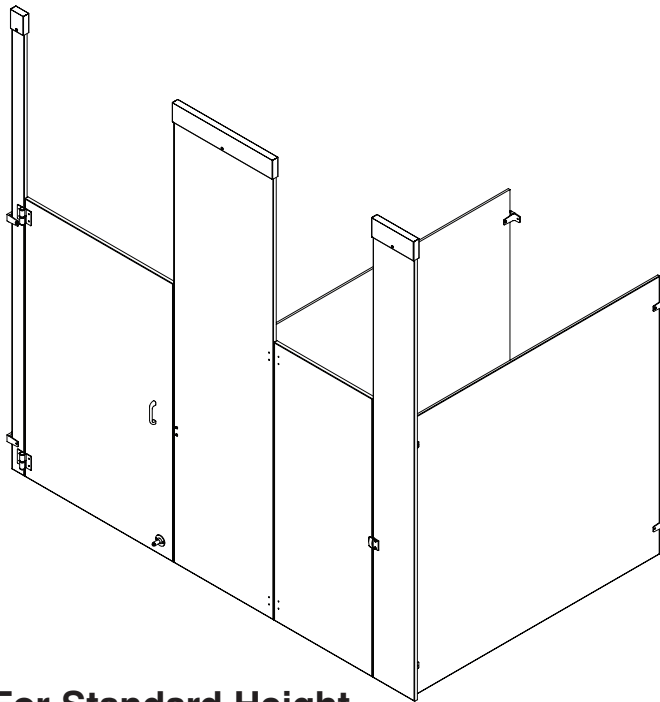

**For Standard Height
Doors and Panels Only**



⚠ WARNING

Before beginning installation, make sure that the wall and floor backing are adequate to support the secure mounting of the toilet compartment units.

Partitions are extremely heavy and may require more than one person to position and install.

Failure to comply with these instructions may result in personal injury and/or property damage and will void the partition warranty.

⚠ CAUTION

Personal protective equipment (PPE) is required during the installation and maintenance of this product.

NOTICE

To prevent warping, always lay the material flat. Do not lean the material against the wall or stack unevenly.

Make sure all floors and walls are clean and smooth. Remove loose impediments, such as protruding nails and other debris which could affect installation.

To minimize break-out, always use a support block when drilling through the material.

Carefully remove components from skid, do not drag.

IMPORTANT

Review your partition layout drawings and verify the number of stalls and components before beginning installation.

Read this installation manual completely to ensure proper installation, then file it with the owner or maintenance department. This installation manual provides instruction for the assembly of normal partition configurations and standard components. Non-standard configurations or components including but not limited to curved or angled walls, partial walls, oversized panels, or modified hardware are not covered in this manual. Compliance and conformity to local codes and ordinances is the responsibility of the installer.


Separate parts from packaging and make sure all parts are accounted for before discarding packaging material. If any parts are missing, do not begin installation until you obtain the missing parts.

Product warranties and parts information may be found under "Products" on Bradley's website at bradleycorp.com.


Supplies Required:

- Chalk line and pencil
- Tape measure and 4' level
- Jigsaw (or hacksaw) and circular saw
- Two spring clamps
- 11/64", 15/64" and 1/4" drill bits
- Power drill or screw gun with drill bit extension
- 5/16" ceramic tile and masonry drill bit
- 3/8" masonry drill bit
- Hammer drill
- Spacer, 12" (305mm) high and strong enough to support weight of panel

Hardware Provided

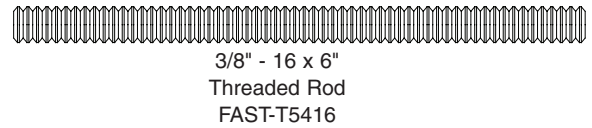

3/8" - 16 x 6"
Threaded Rod
FAST-T5416



1-1/4" Sq. x Ø3/8"
Washer, Beveled
FAST-T680



1/4" - 14 x 5/8"
Sheet Metal Screw
Torx-T27 Drive
FAST-S355A



#14 x 1-1/2"
Button Head
Sheet Metal Screw
Torx-T27 Drive
FAST-Z0043



13/32" x 3/4"
Flat Washer
FAST-S0042




3/8" - 16
Hex Nut
FAST-T375



Spacer Nut
18-8 SS
FAST-S0044



3/8" Lockwasher
FAST-T377



#14 x 2"
Button-Head
Sheet Metal Screw
Torx-T27 Drive
FAST-P002



#14 x 5/8"
Button-Head
Sheet Metal Screw
Torx-T27 Drive
FAST-S0016



#10 x 5/8"
Button-Head
Sheet Metal Screw
Torx-T27 Drive
FAST-S0019



#10 x 1"
Button-Head
Sheet Metal Screw
Torx-T27 Drive
FAST-S0028



#10 x 3/4"
Flat-Head
Sheet Metal Screw
Torx-T25 Drive
FAST-S0006



#14-16
Plastic Anchor
FAST-T373




#10-24 x 3/8"
Button-Head
Machine Screw
Torx-T27 Drive
FAST-S0015



#10-24 x 1/2"
Button-Head
Shoulder Screw
Torx-T27 Drive
FAST-S0018



#10-24 x 3/4"
Button-Head
Shoulder Screw
Torx-T27 Drive
FAST-P004



#10-24 x 1"
Button-Head
Shoulder Screw
Torx-T27 Drive
FAST-P004A




#10-24 x 1/2"
Button-Head
Barrel Nut
Torx-T27 Drive
FAST-S0017



#10-24 x 2"
Flat-Head
Machine Screw
Torx-T25 Drive
FAST-S0027

Example of Submittal Drawing

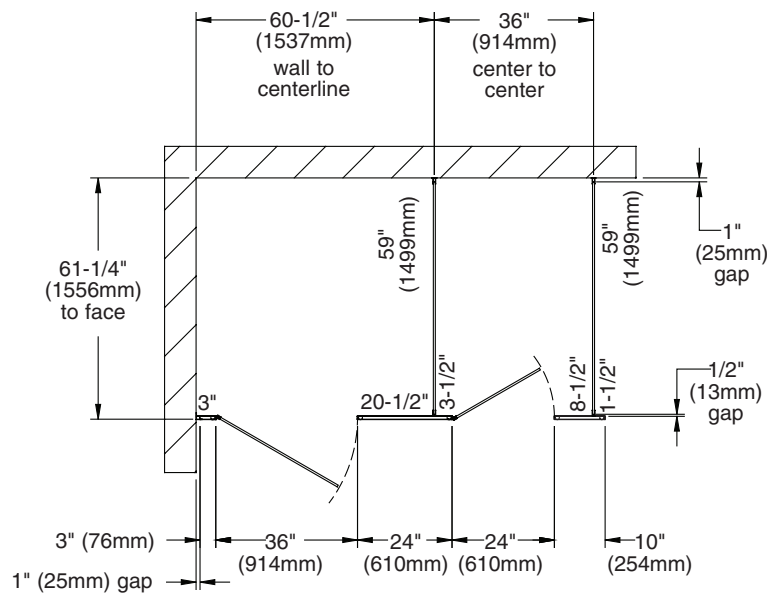


1 Layout Dimensions - Stirrup Bracket (Standard)

When installing the partition components, consult the applicable Mills Partition submittal drawing for compartment layout dimensions.

A **Pilaster centerline:** Measure from the back wall forward to the face of the compartment, subtract 3/8" (10mm) and mark this location on the ceiling ("A"). Mark the same measurement on the opposite end of your layout ("A1") and draw a straight line connecting both marks.
For freestanding (FS) partitions: Refer to submittal drawings and determine the approximate location of the outside panels. Establish dimensions "A" and "A1" as explained above.

B **Panel centerline:** Measure the stall width across the back wall and place a mark at the top of the rear wall ("B"). Repeat this step for each panel, starting each measurement from the last panel centerline ("B1").

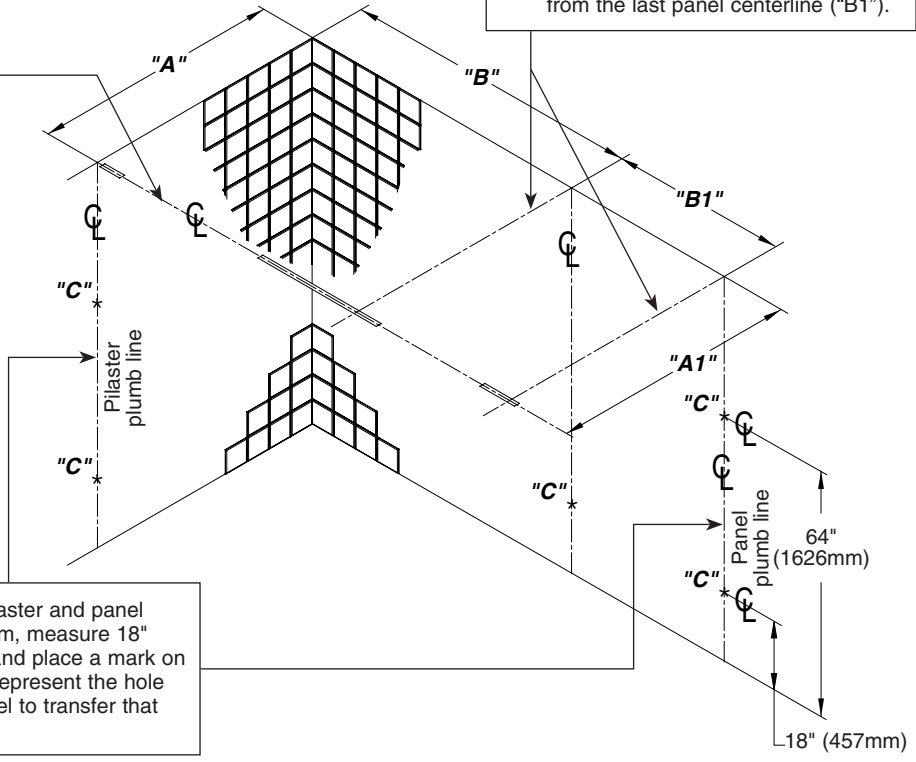


C Draw a plumb line on all walls from each pilaster and panel centerline. From the highest point in the room, measure 18" (457mm) and 64" (1626mm) from the floor and place a mark on the pilaster/panel plumb line. These marks represent the hole center line of the stirrup brackets. Use a level to transfer that mark to all other plumb lines ("C").

1a Layout Dimensions - Continuous Bracket (Optional)

When installing the partition components, consult the applicable Mills Partition submittal drawing for compartment layout dimensions.

A **Pilaster centerline:** Measure from the back wall forward to the face of the compartment, subtract 3/8" (10mm) and mark this location on the ceiling ("A"). Mark the same measurement on the opposite end of your layout ("A1") and draw a straight line connecting both marks.
For freestanding (FS) partitions: Refer to submittal drawings and determine the approximate location of the outside panels. Establish dimensions "A" and "A1" as explained above.

B **Panel centerline:** Measure the stall width across the back wall and place a mark at the top of the rear wall ("B"). Repeat this step for each panel, starting each measurement from the last panel centerline ("B1").

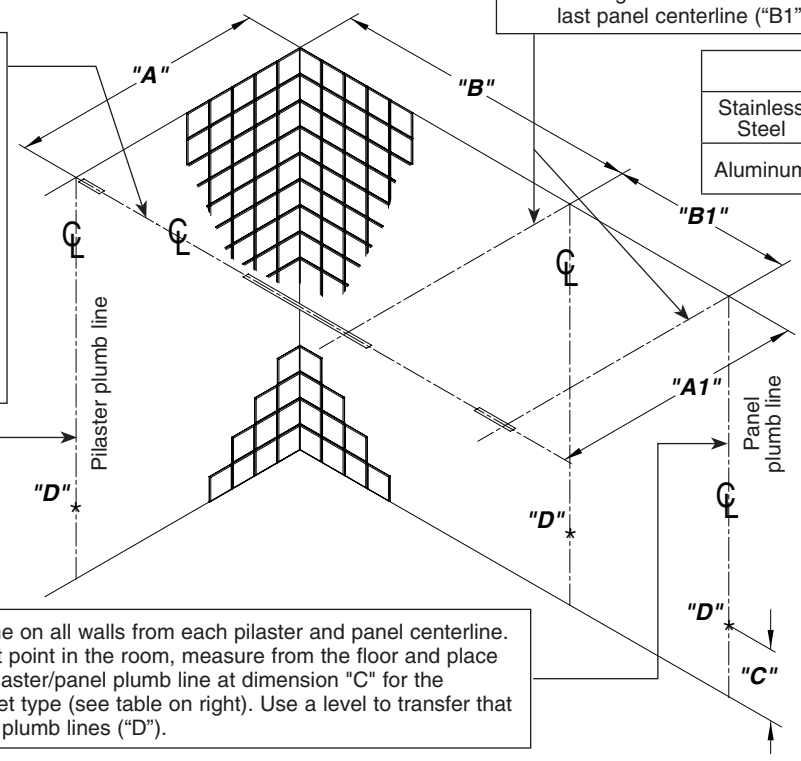

	Dim "C"
Stainless Steel	12-1/2" (318mm)
Aluminum	12-1/4" (311mm)

C Draw a plumb line on all walls from each pilaster and panel centerline. From the highest point in the room, measure from the floor and place a mark on the pilaster/panel plumb line at dimension "C" for the respective bracket type (see table on right). Use a level to transfer that mark to all other plumb lines ("D").


2 Stirrup Brackets to Wall (Standard)

- On end panel and pilaster applications, position the bracket with the ear facing toward the inside of the stall.
- Pilaster bracket is shown here. 3/4" opening brackets are for pilasters and 1/2" opening brackets are for panels.

A Place the center of each stirrup bracket at the established level line. Center the bracket opening on the pilaster/panel plumb line.

B Using the bracket as a template, mark the hole locations on the wall. Remove the bracket and drill a $\text{Ø}5/16$ " hole (min. 2" [51mm] deep) at each hole location.

C Insert the plastic anchors in all holes and secure the brackets to the wall with the #14 x 2" screws provided.

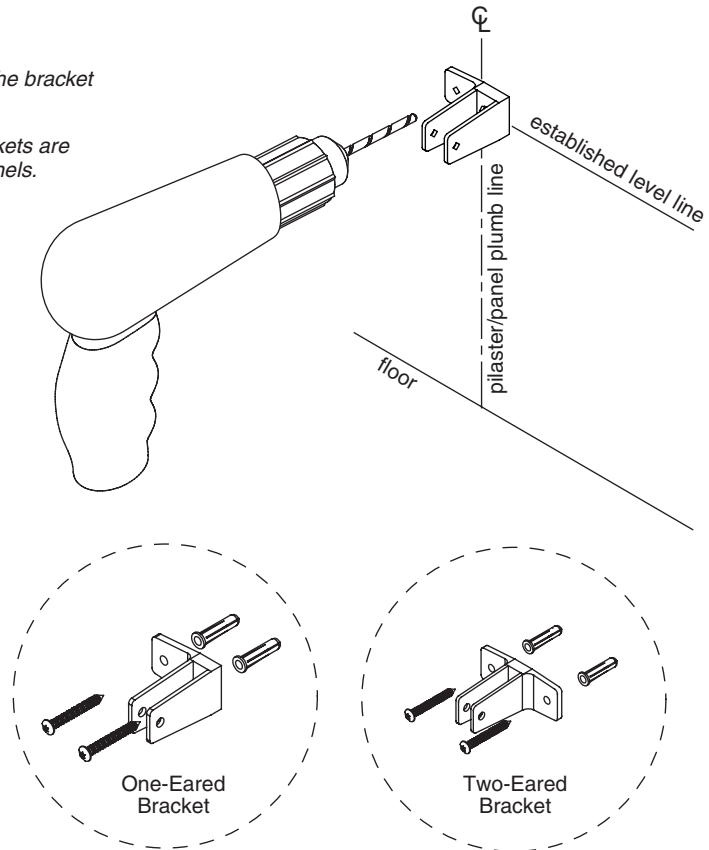


2a Continuous Stainless Steel Brackets to Wall (Optional)

- On pilaster applications, position the bracket with the ear facing toward the inside of the stall.
- Pilaster bracket shown here; "EAR" brackets are for pilasters and "U" brackets are for panels.
- Brackets are used as templates, but since the hole patterns may be different, the brackets may not be interchangeable.

A Place the bottom of each continuous bracket at the established level line. Center the bracket opening on the pilaster/panel plumb line.

B Using the bracket as a template, mark the hole locations on the wall. Remove the bracket and drill a $\text{Ø}5/16$ " hole (min. 2" [51mm] deep) at each hole location.

C Insert the plastic anchors in all holes and secure the brackets to the wall with the #14 x 2" screws provided.

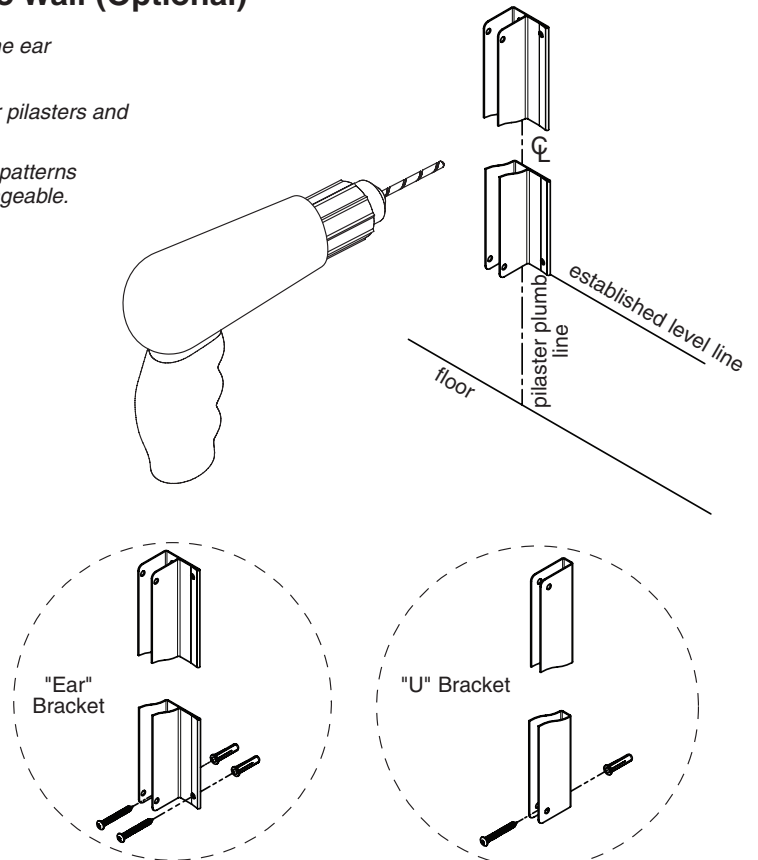




2b Continuous Aluminum Brackets to Wall (Optional)

- On end panel and pilaster applications, position the bracket with the ear facing toward the inside of the stall.
- Pilaster bracket is shown here; 3/4" opening brackets are for pilasters, and 1/2" opening brackets are for panels.
- Brackets are used as templates, but since the hole patterns may be different, the brackets may not be interchangeable.

A Place the bottom of each continuous bracket at the established level line. Center the bracket opening on the pilaster/panel plumb line.

B Using the bracket as a template, mark the hole locations on the wall. Remove the bracket and drill a $\varnothing 5/16"$ hole (min. 2" [51mm] deep) at each hole location.

C Insert the plastic anchors in all holes and secure the brackets to the wall with the #14 x 2" screws provided.

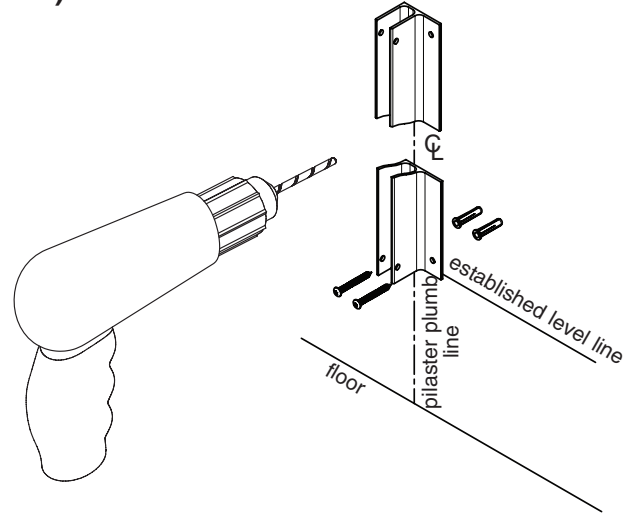

3 Leveling Brackets to Pilaster

- When pilasters are pre-drilled (optional), a notch will be present on one end of the pilaster to indicate that it is the top.


A Slide the shoe onto the top of the pilaster and use a piece of tape to keep the shoe positioned about 5" (127mm) from the end. Make sure the shoe mounting hole is towards the bottom.

B Orientate the leveling bracket(s) as shown. For 3" - 4" pilasters, determine which edge of the pilaster will be the furthest from the wall and orientate to that edge.

C Push bracket locating bumps tight against the top of the pilaster and align the side of the leveling bracket with the pilaster edge.


- DO NOT let the leveling bracket(s) overhang the edge of the pilaster or the shoe will not be able to slide up over the bracket(s).

D Using the leveling bracket as a template, mark the hole locations on the pilaster. Remove bracket and drill $\varnothing 1/4"$ holes through the pilaster. Secure bracket to the pilaster using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

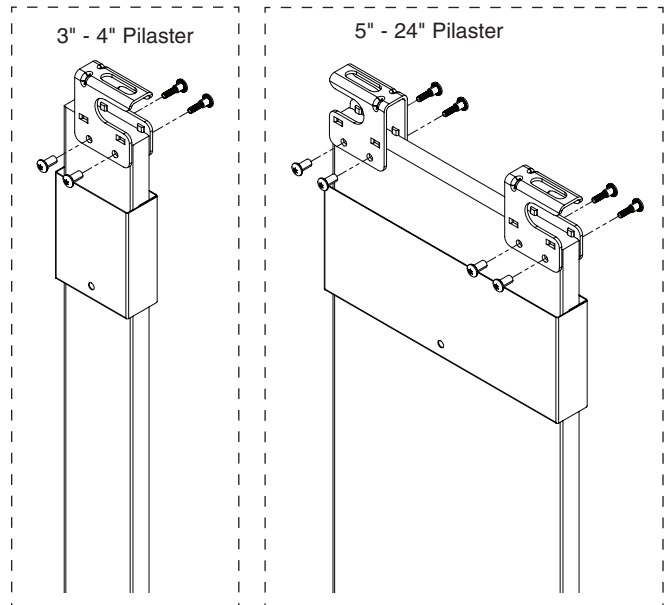

4 Stirrup Brackets to Pilaster (Standard)

Refer to the submittal drawing to locate the split dimension and layout location of each marked pilaster.

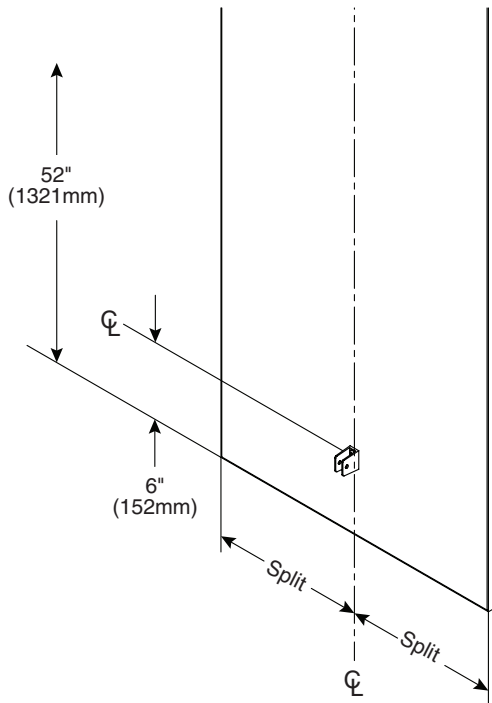


A Measure 6" (152mm) and 52" (1321mm) up from the bottom of each pilaster and place a mark on the pilaster split centerline.

Pilaster shown is for reference only. Actual pilaster varies depending on application.

B Place stirrup brackets at each established level line. Center the bracket opening on the pilaster split centerline. Using the bracket as a template, mark the hole locations on the pilaster. Remove the bracket and drill a $\text{Ø}15/64$ " pilot hole, 5/8" (16mm) deep at each location.

C Secure the stirrup brackets to the pilasters using the #14 x 5/8" screws provided.

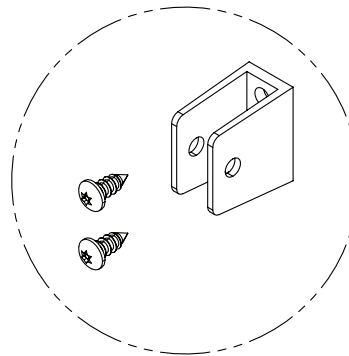


4a Continuous Brackets to Pilaster (Optional)

Refer to the submittal drawing to locate the split dimension and layout location of each marked pilaster.

Brackets are used as templates, but since the hole patterns may be different, the brackets may not be interchangeable.

Continuous stainless steel bracket shown.

	Dim. "A"	Dim. "B"
Stainless Steel Bracket	1/2" (13mm)	57-1/2" (1461mm)
Aluminum Bracket	1/4" (6mm)	57-3/4" (1467mm)

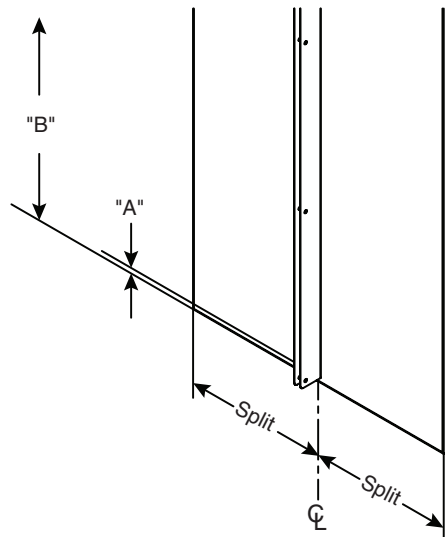


A Measure up from the bottom of the pilaster and place a mark on the pilaster centerline at dimensions "A" and "B" for the respective bracket (see table on left).

Pilaster shown is for reference only. Actual pilaster varies depending on application.

B Place the continuous bracket between each established level line. Center the bracket opening on the pilaster split centerline. Using the bracket as a template, mark the hole locations on the pilaster. Remove the bracket and drill a $\text{Ø}15/64$ " pilot hole, 5/8" (16mm) deep at each location.

C Secure the continuous bracket to the pilaster using the #14 x 5/8" screws provided.



4b Alcove Brackets to Pilaster

Layouts that use continuous aluminum brackets for pilaster and panel connections will use stirrup brackets for alcove connections. Continuous stainless steel brackets use continuous alcove brackets.


Refer to the submittal drawing for the layout location of each alcove pilaster.

A Measure up from the bottom of the pilaster and place a mark at dimensions shown for the respective bracket situation.

B **Stirrup:** Position the center of each bracket at the marks made in Step A.
Continuous: Center the bracket between each mark made in Step A.

C Using the bracket as a template, mark the hole locations on the pilaster. Remove the bracket and drill Ø1/4" holes through the pilaster at each location.


D **Stirrup:** Secure the brackets to the pilaster using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.
Continuous: Secure the brackets to the pilaster using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

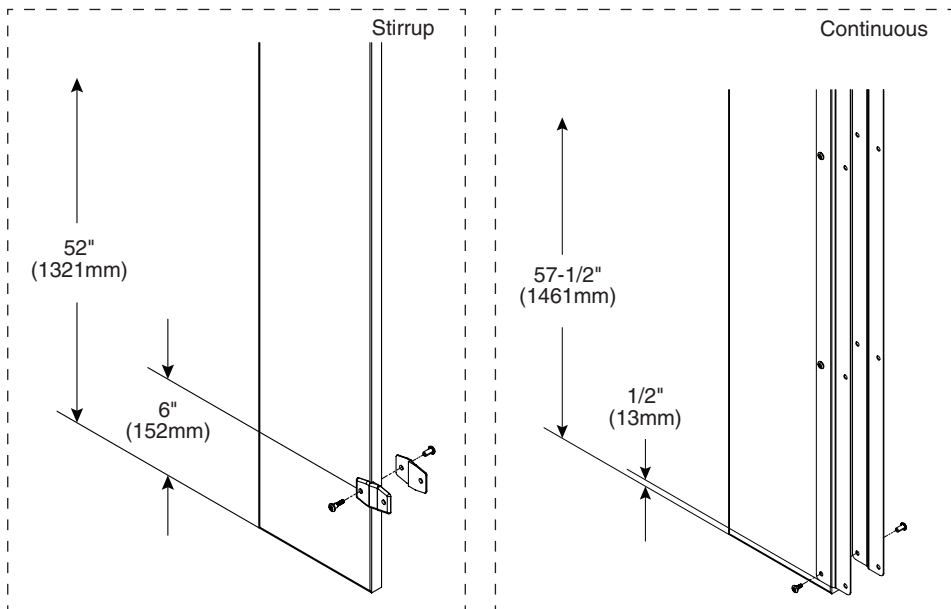

4 Pilaster Mounting Hardware

"C" channel and ceiling (not included) is required for ceiling hung partition installation.


A This view is an example only. Refer to your submittal drawings to determine placement of the anchors on the pilaster centerline for your application. Typical anchor centers are measured 1" (25mm) in from each edge of the pilaster (except 3" & 4" pilasters where only one anchor is used).

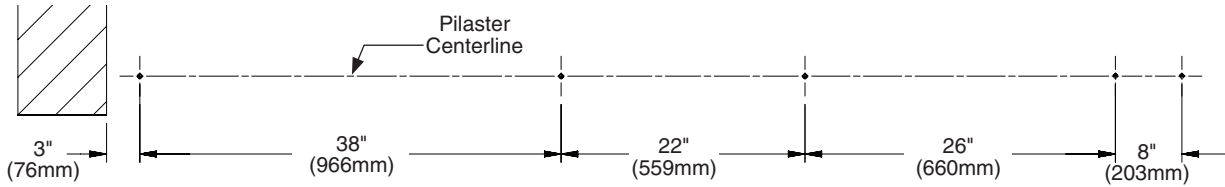


B Drill $\text{Ø}3/8$ " holes in the "C" channel for each pilaster anchor required.

C Place a threaded rod through each hole and secure to the topside of the "C" channel with a 1-1/4" Sq. x $\text{Ø}3/8$ " beveled washer (if needed), 3/8" lockwasher, and 3/8" hex nut.

D Secure the threaded rod to the underside of the "C" channel with a 13/32" x 3/4" washer and 3/8" hex nut. Place an additional hex nut on the underside of the "C" channel for all threaded rods.

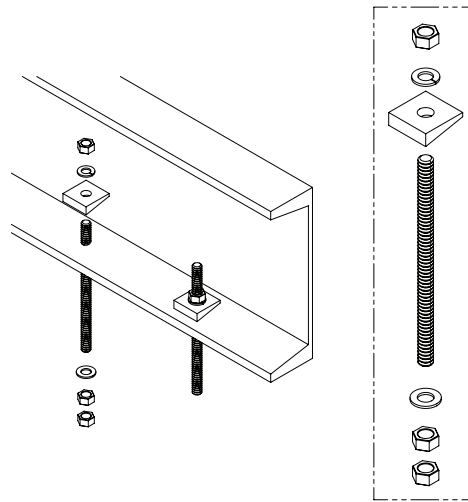

E From the highest point in the room, adjust the support nut to approximately 3/4" (19mm) down from the finished ceiling. Level and adjust the remaining support nuts to this height.

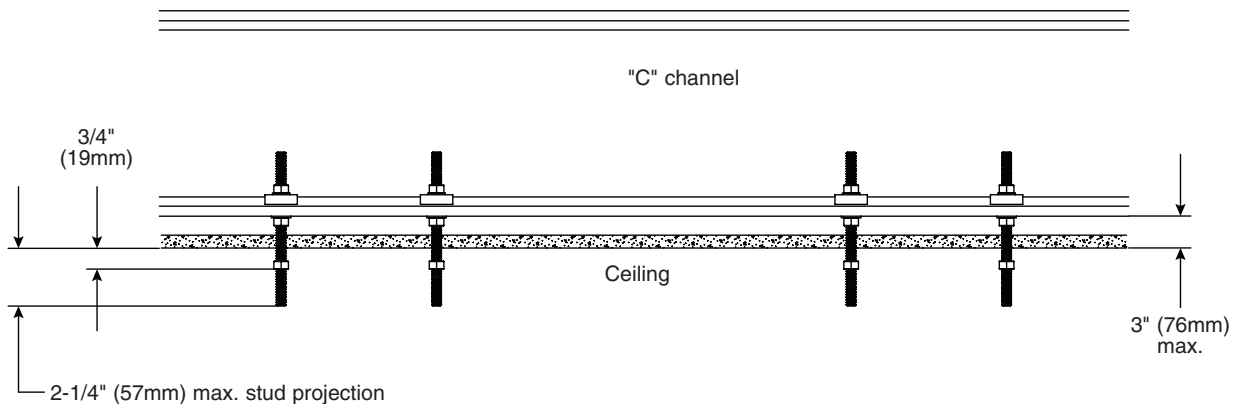

6 Pilasters and Panels with Stirrup Brackets (Standard)


- ☑ *Pilasters located at walls should be mounted first. Start at one end and install a panel, then a pilaster. Continue alternating until installation is complete. When installing in an alcove or in-corner, use an alcove bracket to secure the pilaster to the panel.*
- ☑ *Check to make sure the pilasters are plumb and level to each other. The pilaster height can be adjusted by moving the support nuts on the threaded rod up or down (see page 8).*

Pilasters at Wall

- ☑ *When installing pilasters at walls, the gaps range from 1/2" to 1-1/4" (13mm to 32mm). Refer to your submittal drawing for your gap sizes.*

A Place a 13/32" x 3/4" washer onto each threaded rod, then set the pilaster up onto the mounting hardware while at the same time placing the pilaster within the wall brackets. Secure the pilaster to the mounting hardware using the 13/32" x 3/4" washer(s), spacer nut(s), and 3/8" hex nut(s) provided.

B Using the bracket as a template, drill Ø1/4" holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

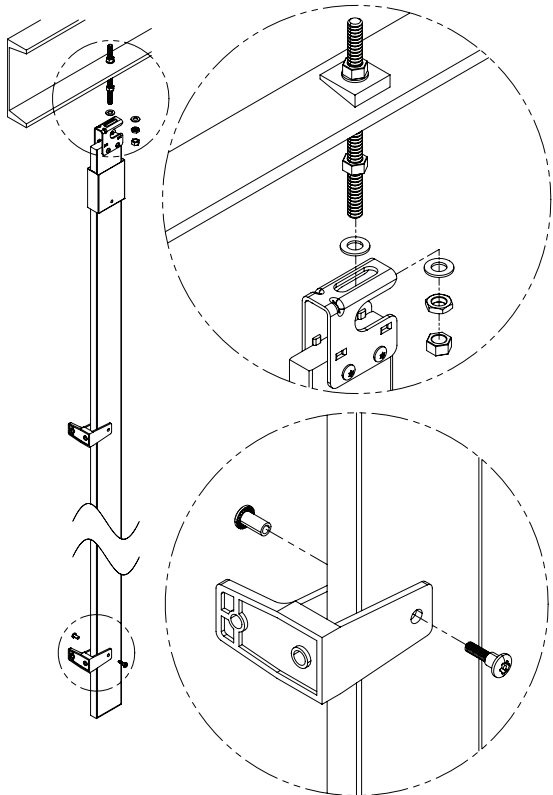


Pilasters with Panels

- ☑ *Refer to your submittal drawing and leave the appropriate gaps. Standard gap is 1" (25mm) between the panel and wall and 1/2" (13mm) between the panel and pilaster.*

A Place the panel on the spacer and insert the panel into the wall brackets.

B Place a 13/32" x 3/4" washer onto each threaded rod, then set the pilaster up onto the mounting hardware while at the same time placing the brackets around the panel. Secure the pilaster to the mounting hardware using the 13/32" x 3/4" washer(s), spacer nut(s), and 3/8" hex nut(s) provided.

C Using the bracket as a template, drill Ø1/4" holes through the panel at each panel bracket hole. Secure the panel to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

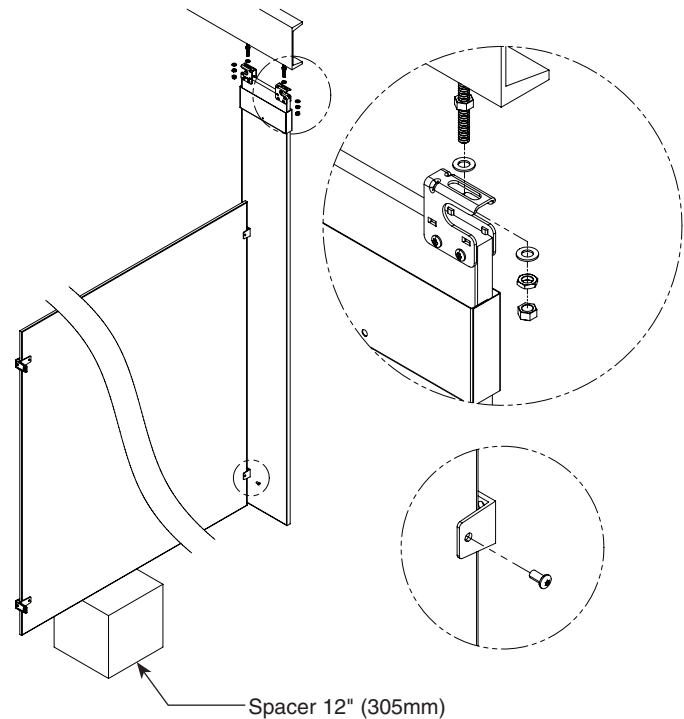

6a Pilasters and Panels with Stainless Steel Continuous Brackets (Optional)


- ✓ *Pilasters located at walls should be mounted first. Start at one end and install a panel, then a pilaster. Continue alternating until installation is complete. When installing in an alcove or in-corner, use an alcove bracket to secure the pilaster to the panel.*
- ✓ *Check to make sure the pilasters are plumb and level to each other. The pilaster height can be adjusted by moving the support nuts on the threaded rod up or down (see page 8).*

Pilasters at Wall

- ✓ *When installing pilasters at walls, the gaps range from 1/2" to 1-1/4" (13mm to 32mm). Refer to your submittal drawing for your gap sizes.*

A Place a 13/32" x 3/4" washer onto each threaded rod, then set the pilaster up onto the mounting hardware while at the same time placing the pilaster within the wall bracket. Secure the pilaster to the mounting hardware using the 13/32" x 3/4" washer(s), spacer nut(s), and 3/8" hex nut(s) provided.

B Using the bracket as a template, drill Ø1/4" holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

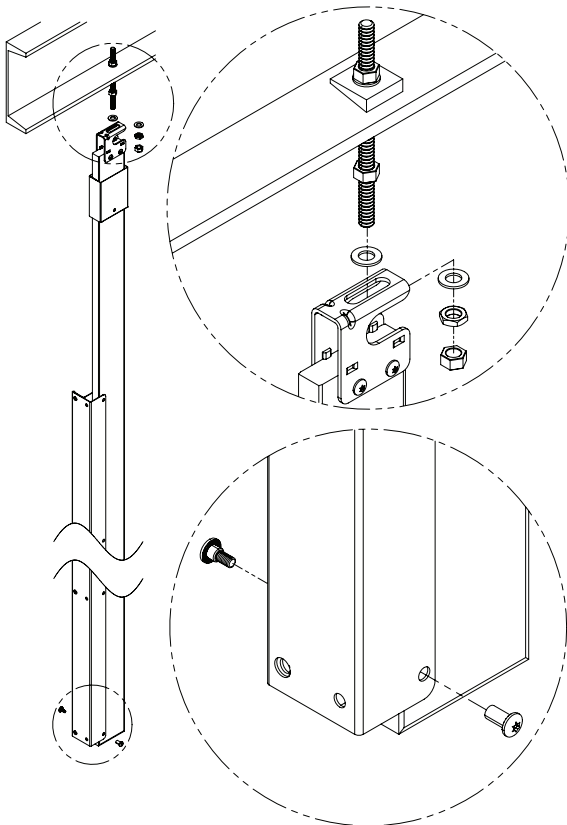


Pilasters with Panels

- ✓ *Refer to your submittal drawing and leave the appropriate gaps. Standard gap is 1" (25mm) between the panel and wall and 1/2" (13mm) between the panel and pilaster.*

A Place the panel on the spacer and insert the panel into the wall bracket.

B Place a 13/32" x 3/4" washer onto each threaded rod, then set the pilaster up onto the mounting hardware while at the same time placing the bracket around the panel. Secure the pilaster to the mounting hardware using the 13/32" x 3/4" washer(s), spacer nut(s), and 3/8" hex nut(s) provided.

C Using the bracket as a template, drill Ø1/4" holes through the panel at each panel bracket hole. Secure the panel to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/8" machine screws provided.

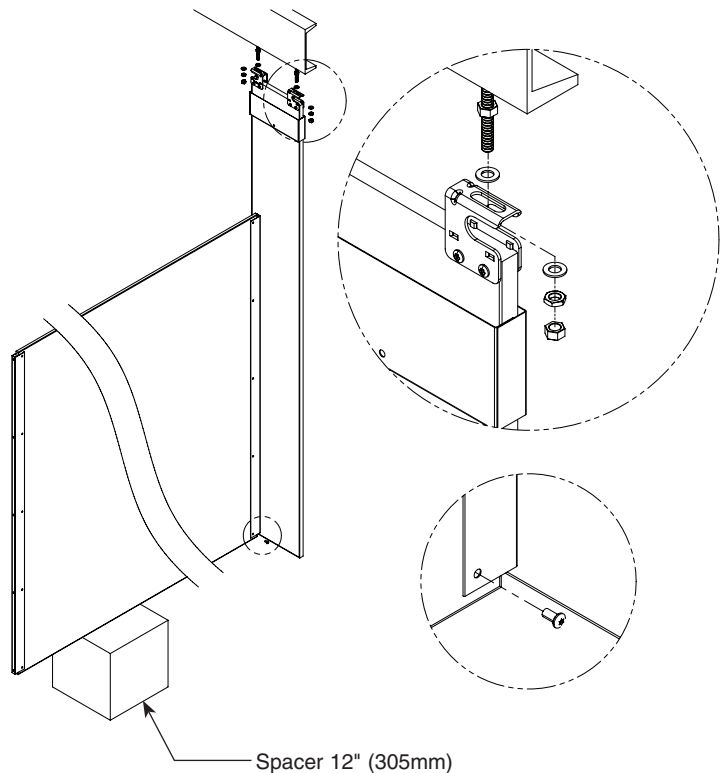

6b Pilasters and Panels with Aluminum Continuous Brackets (Optional)


- Pilasters located at walls should be mounted first. Start at one end and install a panel, then a pilaster. Continue alternating until installation is complete. When installing in an alcove or in-corner, use an alcove bracket to secure the pilaster to the panel.
- Check to make sure the pilasters are plumb and level to each other. The pilaster height can be adjusted by moving the support nuts on the threaded rod up or down (see page 8).

Pilasters at Wall

- When installing pilasters at walls, the gaps range from 1/2" to 1-1/4" (13mm to 32mm). Refer to your submittal drawing for your gap sizes.

A Place a 13/32" x 3/4" washer onto each threaded rod, then set the pilaster up onto the mounting hardware while at the same time placing the pilaster within the wall bracket. Secure the pilaster to the mounting hardware using the 13/32" x 3/4" washer(s), spacer nut(s), and 3/8" hex nut(s) provided.

B Using the bracket as a template, drill Ø1/4" holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

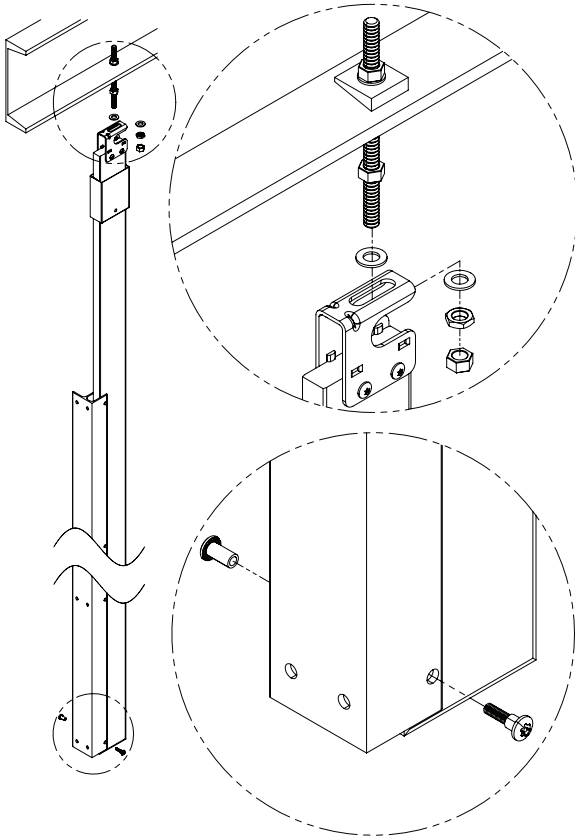


Pilasters with Panels

- Refer to your submittal drawing and leave the appropriate gaps. Standard gap is 1" (25mm) between the panel and wall and 1/2" (13mm) between the panel and pilaster.

A Place the panel on the spacer and insert the panel into the wall bracket.

B Place a 13/32" x 3/4" washer onto each threaded rod, then set the pilaster up onto the mounting hardware while at the same time placing the bracket around the panel. Secure the pilaster to the mounting hardware using the 13/32" x 3/4" washer(s), spacer nut(s), and 3/8" hex nut(s) provided.

C Using the bracket as a template, drill Ø1/4" holes through the panel at each panel bracket hole. Secure the panel to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

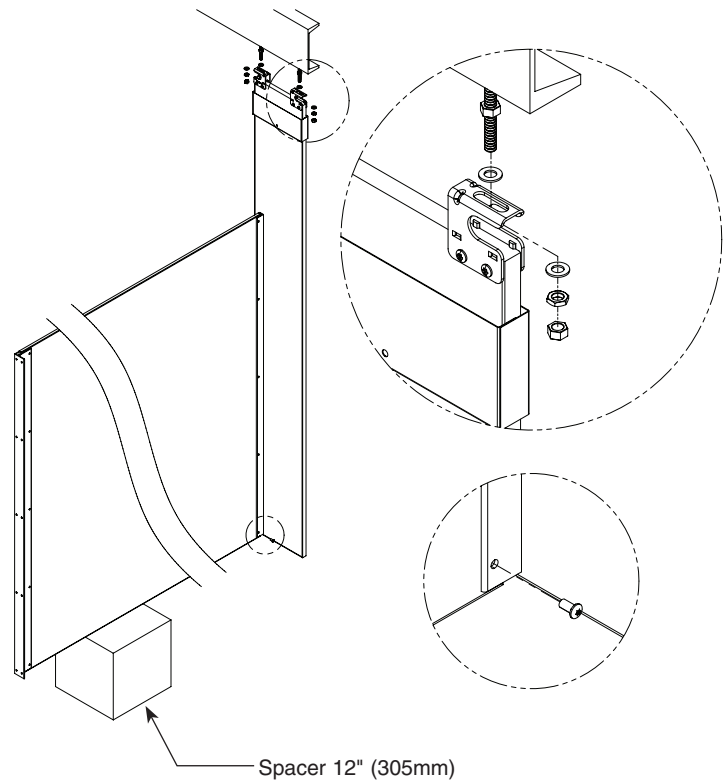



6c Wall-Hung Pilasters (58") - Stirrup Brackets (Optional)

- See Step 2 for instructions on mounting the stirrup brackets to a wall.
- See Step 4 for instructions on mounting the stirrup brackets to a pilaster.
- To establish level line, from the highest point in the room, measure 12" (305mm) from the floor. Use a level to transfer this mark to the pilaster plumb line.

Pilasters at Wall

A Slide the wall-hung pilaster into the stirrup brackets and align with the established level line. Refer to the submittal drawing and adjust to meet the specified dimension.



B Using the bracket as a template, drill $\text{\O}1/4"$ holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

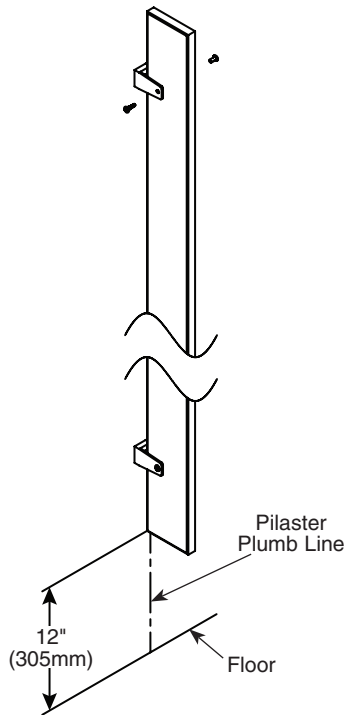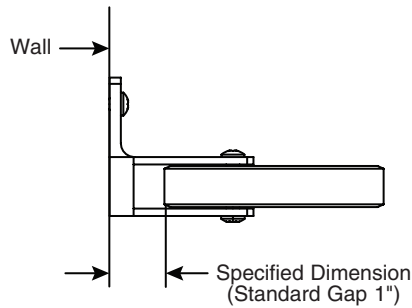

Pilasters at Pilasters

A Slide the wall-hung pilaster into the stirrup brackets and align with the established level line. Refer to the submittal drawing and adjust to meet the specified dimension.

B Using the bracket as a template, drill $\text{\O}1/4"$ holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

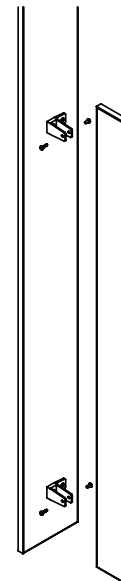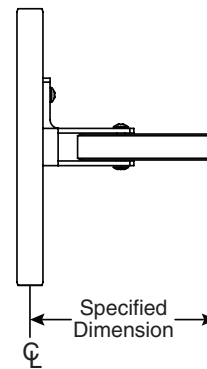



6d Wall-Hung Pilasters (58") - Continuous Stainless Steel Brackets (Optional)

- See Step 2a for instructions on mounting the continuous stainless steel brackets to a wall.
- See Step 4a for instructions on mounting the continuous stainless steel brackets to a pilaster.
- To establish level line, from the highest point in the room, measure 12" (305mm) from the floor. Use a level to transfer this mark to the pilaster plumb line.

Pilasters at Wall

A Slide the wall-hung pilaster into the continuous bracket and align with the established level line. Refer to the submittal drawing and adjust to meet the specified dimension.



B Using the bracket as a template, drill $\text{Ø}1/4"$ holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

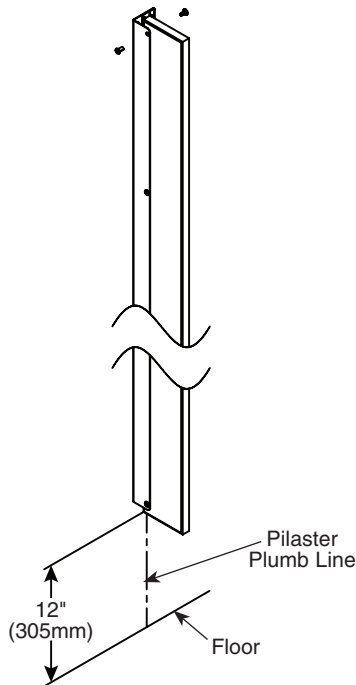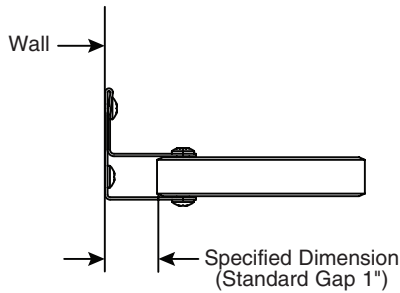

Pilasters at Pilasters

A Slide the wall-hung pilaster into the continuous bracket and align with the established level line. Refer to the submittal drawing and adjust to meet the specified dimension.

B Using the bracket as a template, drill $\text{Ø}1/4"$ holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

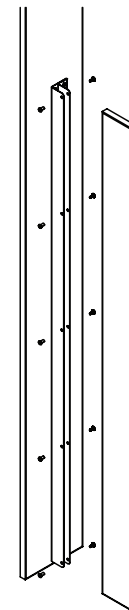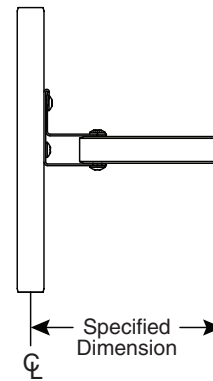



6e Wall-Hung Pilasters (58") - Continuous Aluminum Brackets (Optional)

- See Step 2b for instructions on mounting the continuous aluminum brackets to a wall.
- See Step 4a for instructions on mounting the continuous aluminum brackets to a pilaster.
- To establish level line, from the highest point in the room, measure 12" (305mm) from the floor. Use a level to transfer this mark to the pilaster plumb line.

Pilasters at Wall

A Slide the wall-hung pilaster into the continuous bracket and align with the established level line. Refer to the submittal drawing and adjust to meet the specified dimension.



B Using the bracket as a template, drill $\text{Ø}1/4"$ holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

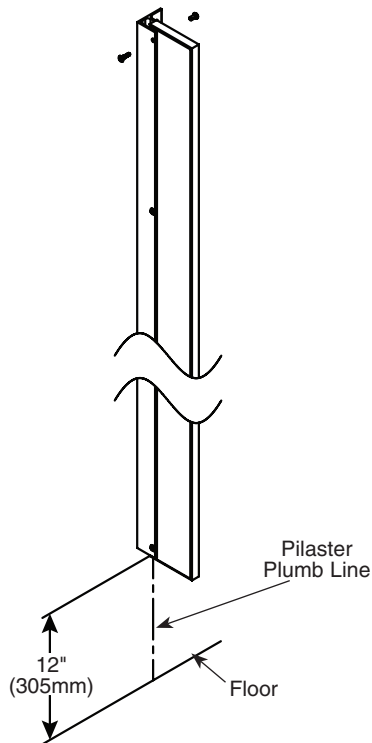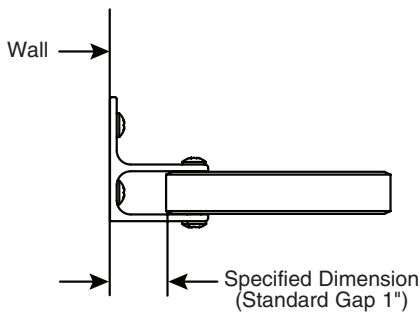

Pilasters at Pilasters

A Slide the wall-hung pilaster into the continuous bracket and align with the established level line. Refer to the submittal drawing and adjust to meet the specified dimension.


B Using the bracket as a template, drill $\text{Ø}1/4"$ holes through the pilaster at each pilaster bracket hole. Secure the pilaster to the bracket using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

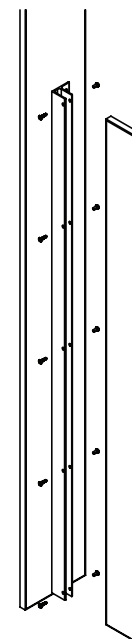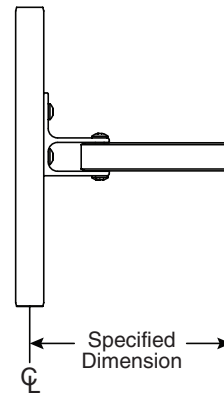

7 Pilaster Shoes

A Position pilaster shoe so that it rests flush with the ceiling.

B Using the hole(s) in the shoe as a template, drill a $\text{Ø}15/64$ " hole through the pilaster. Secure the shoe to the pilaster using the #14 x 5/8" fasteners provided.

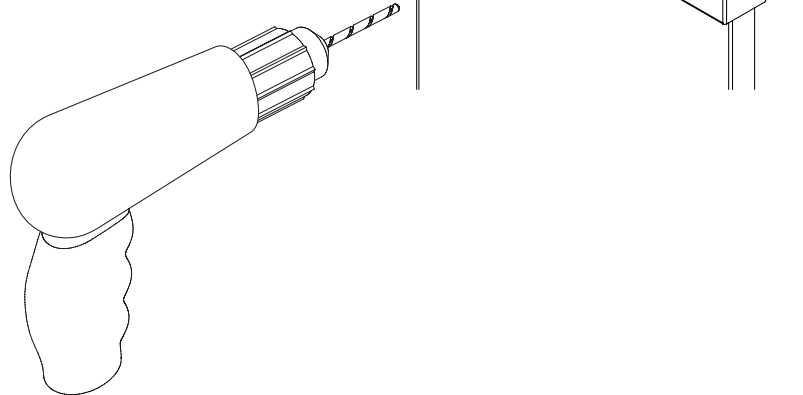

8 Cross Bracing (Standard on Ceiling Heights 9'-0" and Above)

When installing cross bracing, consult the applicable Mills Partition submittal drawings for specific location.


A From the inside of the stall, position the cross brace piece so that the bottom edge is a minimum of 80" (2032mm) above the finished floor.

B Drill (2) $\text{Ø}15/64$ " pilot holes through the cross brace piece and 5/8" (16mm) deep into each pilaster that the cross brace piece spans. Holes should be a minimum of 1" (25mm) from pilaster edge, 1" (25mm) from cross brace piece edge, and spaced diagonally from each other as shown.

C For the cross braced piece only, remove and enlarge pilot holes to $\text{Ø}1/4$ ".


D Reposition and secure cross brace piece to pilasters with the #14 x 1-1/2" screws provided.

E For open end configurations, place provided end cap into cross brace piece as shown.

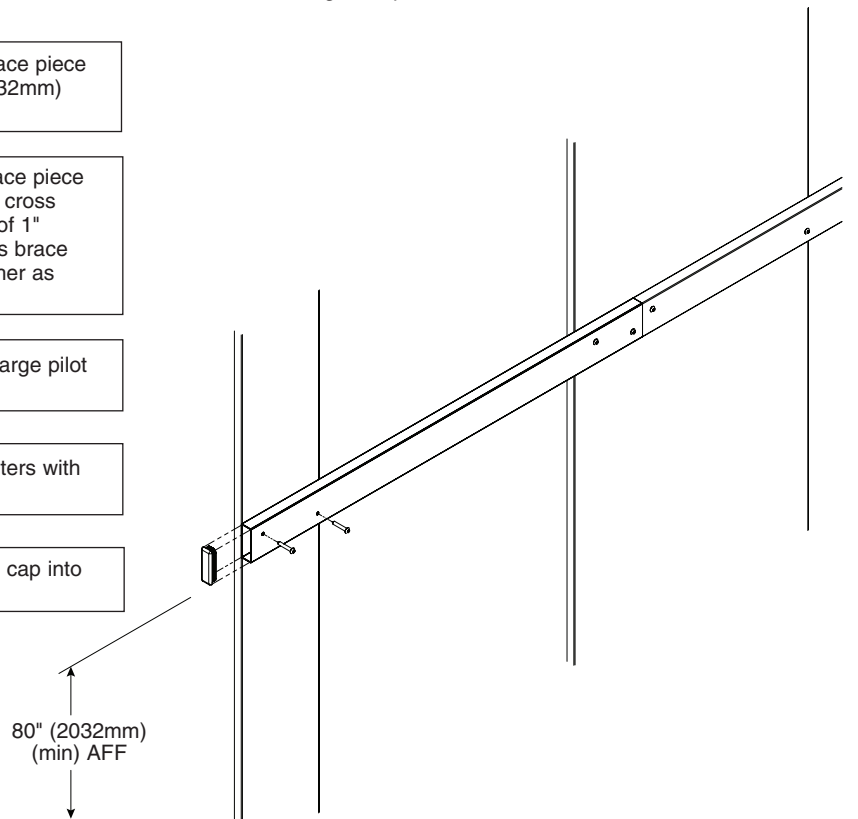

9 Surface-Mounted Hinges (Standard)

- Before installing the hinges, make sure the door openings are the appropriate size, all pilasters are plumb and secured to the ceiling.
- Refer to your submittal drawings to determine each specific door swing for your application. The door swing is determined by facing the compartment from the outside. The image below can help determine the door swing type.

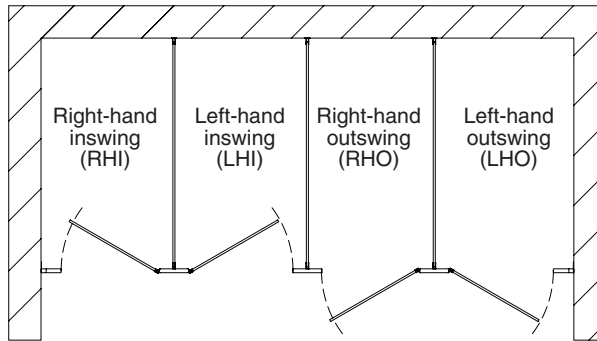

Surface Hinge Kits

The part numbers listed below are prefixes only and are used to identify the appropriate door kit based on your door swing as determined above. Inswinging doors should have hinges mounted on the inside of the stall while outswinging doors should have hinges mounted on the outside of the stall.

Part # Prefix	Description	Part # Prefix	Description
HDWC-SD1-LH	left hand in	HDWC-SD2-LH	left hand out
HDWC-SD1-RH	right hand in	HDWC-SD2-RH	right hand out

Ceiling Hung



Wall Hung 58" (1473mm)

A

At 1-1/32" (26mm) from the edge of the pilaster, measure up from the bottom and place a mark at dimensions "A" and "B" for the respective pilaster type (see table below). This mark represents the lower hole location of the top and bottom hinge.

B

Using the hinge as a template, drill Ø1/4" holes through the pilaster.

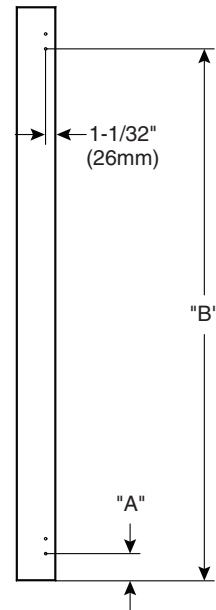
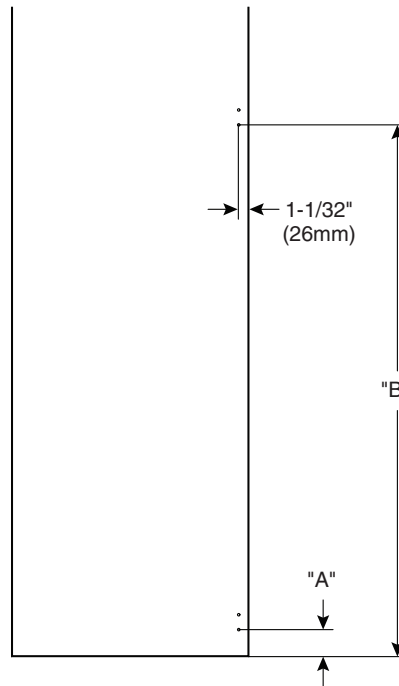


	Dim. "A"	Dim. "B"
Ceiling Hung	2-3/4" (70mm)	53-3/4" (1365mm)
Wall Hung 58" (1473mm)	2-3/4" (70mm)	53-3/4" (1365mm)



9 Surface-Mounted Hinges (Continued)

- The knuckle gap of the top hinge varies based on the pintle setting.
- Left-hand outswing door shown.

- C** Secure the top and bottom hinge to the pilaster with the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.
- D** Adjust the ribs on the pintle to align with the notches on the top hinge and set the door's "at rest" position to 0° (see detail below).
- E** With the door in the closed position, place on a 12" (305mm) spacer and set the gap between the door and pilaster to 3/16" (5mm).
- F** Using the top and bottom hinge as a template, drill $\varnothing 1/4$ " holes through the door. Secure the bottom hinge to the door using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.
- G** If 0° is the desired "at rest" position, continue to step H; otherwise, remove the door side of the top hinge and adjust the ribs on the pintle to align with the notches on the top hinge to set the desired "at rest" position.
- When "at rest" position is greater than 0°, push top hinge flat against the door surface and raise door accordingly to align the holes drilled in step F.
- H** Secure the top hinge to the door using the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

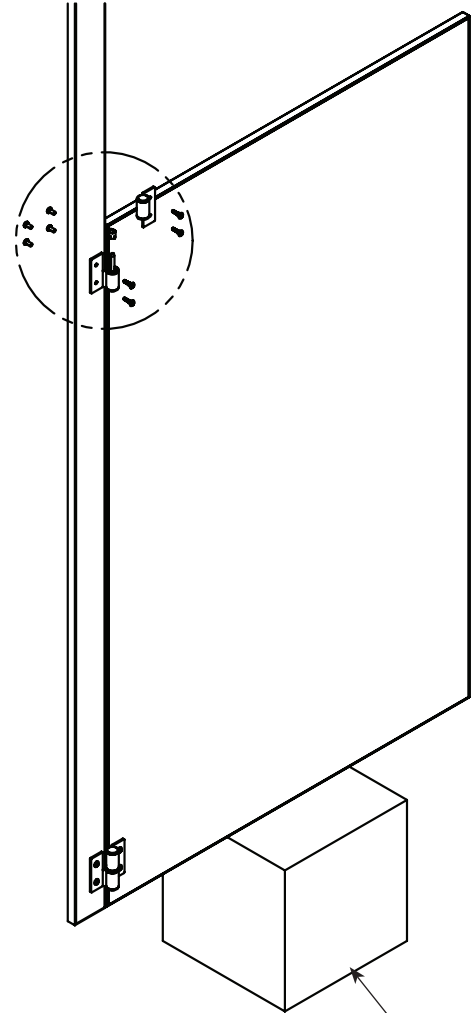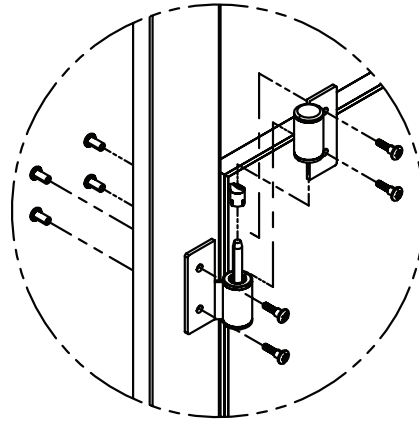


Spacer 12" (305mm)

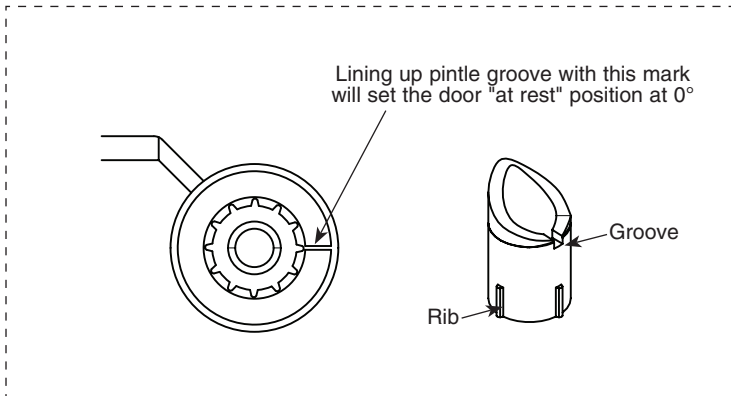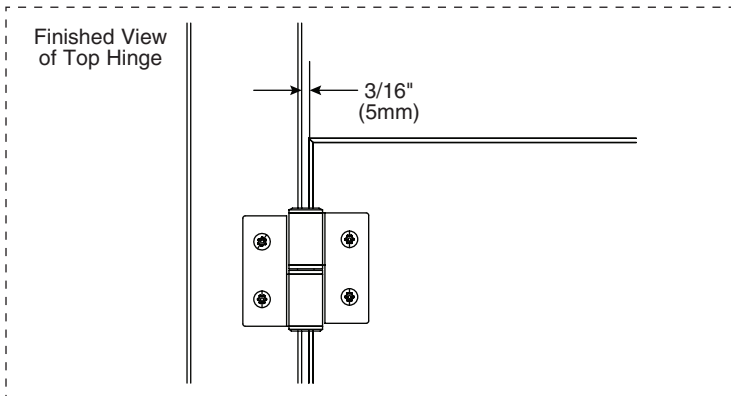


9a Continuous Spring-Loaded Piano Hinge (Optional)

- Before installing the hinges, make sure the door openings are the appropriate size, all pilasters are plumb and secured to the ceiling.
- Refer to your submittal drawings to determine each specific door swing for your application. The door swing is determined by facing the compartment from the outside. The image below can help determine the door swing type.

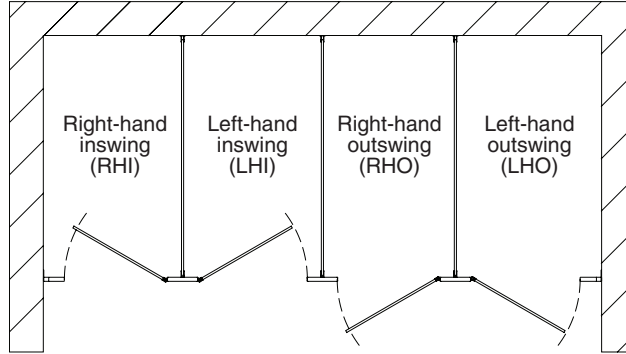


<p>Continuous Piano Hinge</p> <p>The part numbers listed are prefixes only and are used to identify the appropriate door kit based on your door swing as determined above. Inswinging doors should have hinges mounted on the inside of the stall while outswinging doors should have hinges mounted on the outside of the stall.</p>	<p>Part # Prefix HDWT-S0209 (left hand in, right hand out, knuckles facing front)</p> <p>Door side Pilaster side</p>	<p>Part # Prefix HDWT-S0208 (right hand in, left hand out, knuckles facing front)</p> <p>Door side Pilaster side</p>
--	---	---


- A** Place door on a 12" (305mm) spacer and set the door gaps. Standard hinge side gap is 3/16" (5mm).
- B** Position the hinge so it is plumb and centered within the 3/16" (5mm) gap and centered top to bottom (approximately 1/4" (6mm) down from the top of the door).
- C** Using the hinge as a template, drill Ø1/4" holes through the door at the top and bottom holes. Secure the hinge to the door using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.
- D** Verify the hinge side gap is still at 3/16" (5mm). Using the hinge as a template, drill Ø1/4" holes through the pilaster at the top and bottom holes. Secure the hinge to the pilaster using the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.
- E** Using the hinge as a template, drill Ø1/4" holes for all remaining hinge holes through both the door and pilaster. Secure hinge with fasteners provided.

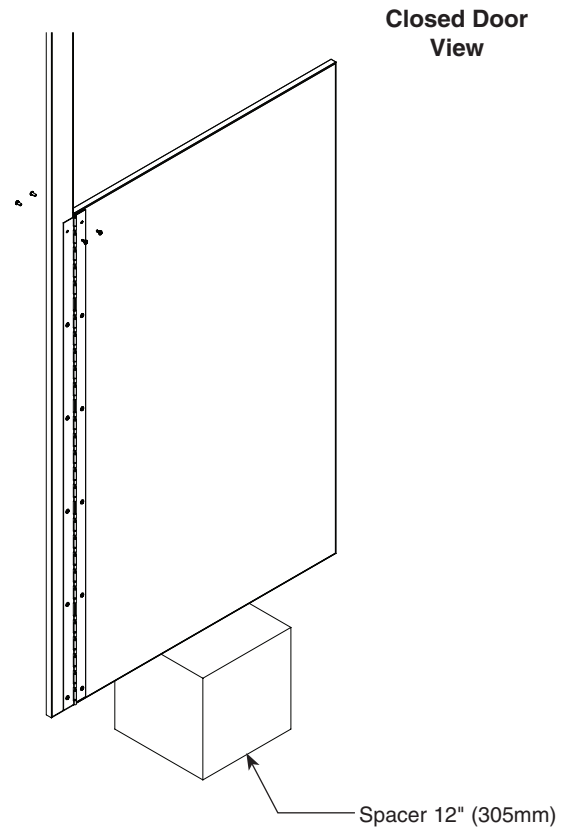

10 Door Hardware for Inswing Doors - Surface


 Local codes vary from state to state. Check your local codes before installing the coat hook and door pulls.

A Position latch centered top to bottom and with the leading edge 1/8" (3mm) from the door edge. Using the latch as a template, mark the hole locations and drill Ø11/64" pilot holes, 5/8" (16mm) deep. Secure latch to door with the #10 x 5/8" screws provided.

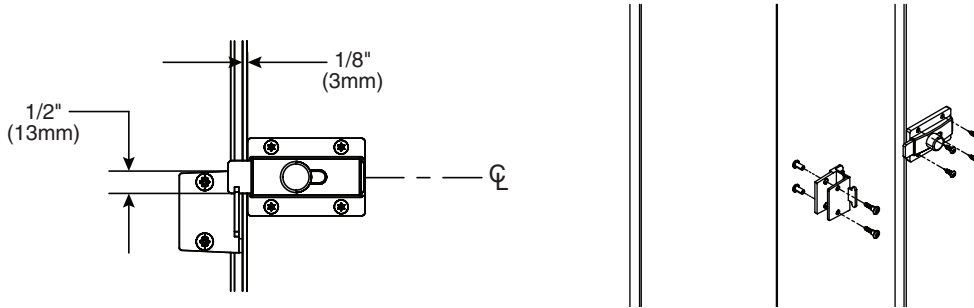


B With the door in the closed position, position the strike/keeper on the pilaster and align the top so it is 1/2" (13mm) above the bottom of the latch slide bar. Using the strike/keeper as a template, mark the hole locations and drill Ø1/4" holes through the pilaster. Secure the strike/keeper to the pilaster with the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

C For 34" - 36" doors, mark the location for the top hole on the inside face of the door 30-3/4" (781mm) up from the bottom of 58" tall doors (42-3/4" [1086mm] above finished floor) and 5-1/2" (140mm) from the door edge. Drill (2) Ø1/4" holes (spaced 3-1/2" [89mm] apart) through the door and secure the door pulls to the door as shown with the #10-24 x 2" flat machine screws provided.

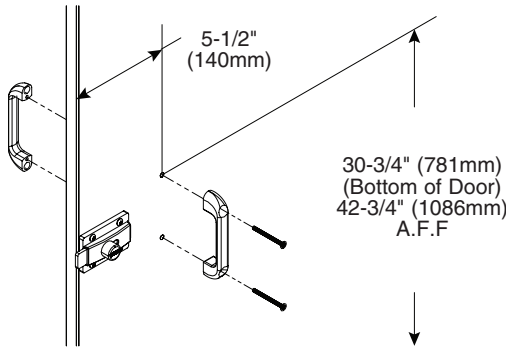


D Place the coat hook 3" (76mm) down from the top and 3" (76mm) from the latch side of the door (hook goes on the inside face of the door). Using the hook as a template, drill (2) Ø11/64" pilot holes, 5/8" (16mm) deep. Secure with the #10 x 5/8" screws provided.

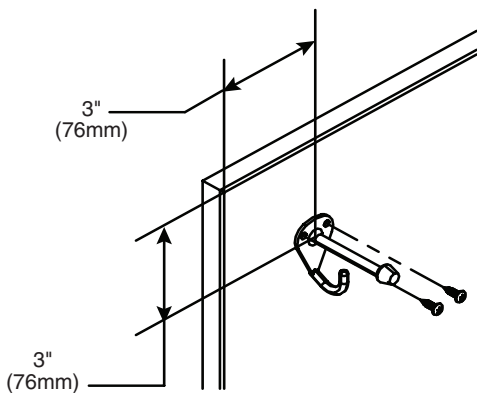


Flat Strike/Keeper

E With the door in the closed position, place flat strike/keeper so the latch slide bar fits within the slot.




F Using the flat strike/keeper as a template, drill (2) Ø11/64" pilot holes, 5/8" (16mm) deep. Secure the flat strike/keeper to the pilaster using the #10 x 3/4" flat head screws provided.

10a Door Hardware for Outswing Doors - Surface


 Local codes vary from state to state. Check your local codes before installing the coat hook and door pulls.

A Position latch centered top to bottom and with the leading edge 5/8" (16mm) from the door edge. Using the latch as a template, mark the hole locations and drill Ø11/64" pilot holes, 5/8" (16mm) deep. Secure latch and spacer to door with the #10 x 1" screws provided.

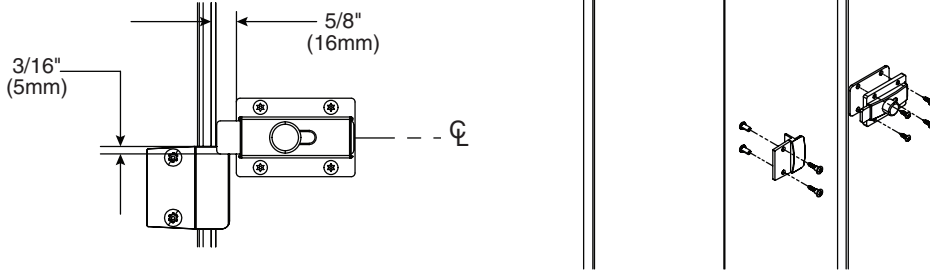


B With the door in the closed position, position the strike/keeper on the pilaster and align the top so it is a maximum of 3/16" (5mm) above the bottom of the latch slide bar. Using the strike/keeper as a template, mark the hole locations and drill Ø1/4" holes through the pilaster. Secure the strike/keeper to the pilaster with the #10-24 x 1/2" barrel nuts and #10-24 x 3/4" shoulder screws provided.

C Mark the location for the top hole on the inside face of the door 30-3/4" (781mm) up from the bottom of 58" tall doors (42-3/4" [1086mm] above finished floor) and 5-1/2" (140mm) from the door edge. Drill (2) Ø1/4" holes (spaced 3-1/2" [89mm] apart) through the door and secure the door pulls to the door as shown with the #10-24 x 2" flat machine screws provided.

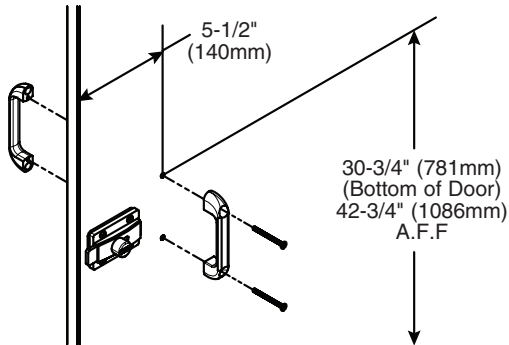


D Position the wall bumper 3" (76mm) up from the bottom and 3" (76mm) from the latch side of the door (bumper goes on the outside face of the door). Using the bumper as a template, drill (2) Ø11/64" pilot holes, 5/8" (16mm) deep. Secure to door with the #10 x 5/8" screws provided.

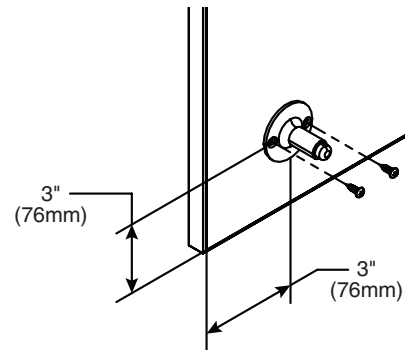

Flat Strike/Keeper

F With the door in the closed position, position the flat strike/keeper on the pilaster and align the top so it is 3/16" (5mm) above the bottom of the latch slide bar.


G Using the flat strike/keeper as a template, drill (2) Ø11/64" pilot holes, 5/8" (16mm) deep. Secure the flat strike/keeper to the pilaster using the #10 x 3/4" flat head screws provided.

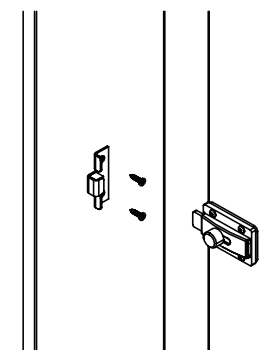

36"
(914mm)
A.F.F.


E Position the coat hook 36" (914mm) above finished floor (hook goes on the inside of compartment). Using the hook as a template, drill (2) Ø15/64" pilot holes, 5/8" (16mm) deep. Secure with the #14 x 5/8" screws provided.

11 Urinal Screens with Stirrup Brackets (Standard)

 Before installing the urinal screen components, determine the correct location for your application

A Draw a plumb line on the wall to represent the urinal screen centerline. Measure from the highest point in the room and place a mark on the urinal screen centerline at dimensions "A", "B" and "C" for the respective urinal screen height (see table below).


B Position and center brackets at each mark and urinal screen centerline. Using the bracket as a template, mark the hole locations on the wall. Remove the bracket and drill a Ø5/16" hole (minimum 2" [51mm] deep) at each hole location.

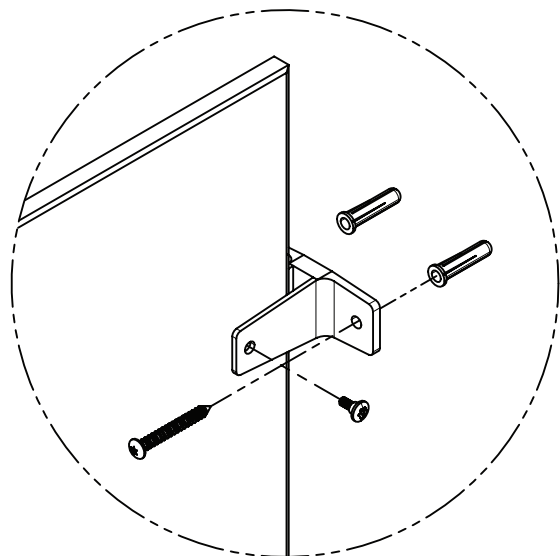

C Insert plastic anchors in all holes and secure bracket to the wall with the #14 x 2" screws provided.

D Place the urinal screen at dimension "D" for the respective urinal screen height (see table on right) and insert it into the wall brackets until a 1" (25mm) gap between the wall and urinal screen is established.

E Using the bracket as a template, drill Ø1/4" holes through the urinal screen at each bracket hole. Secure the urinal screen to the brackets with the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

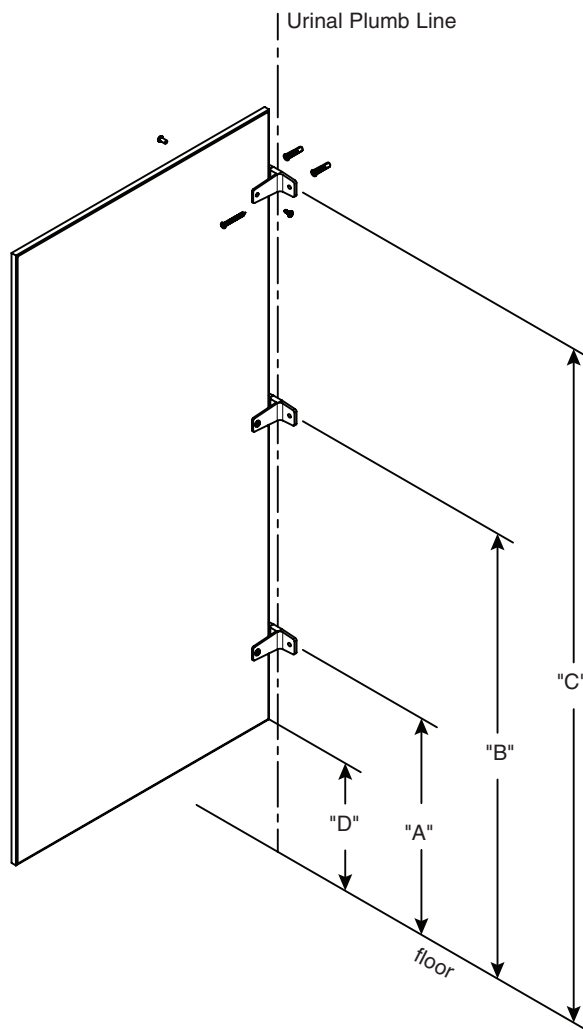


	Dim "A"	Dim "B"	Dim "C"	Dim "D"
42" Urinal Screen	24" (610mm)	39" (991mm)	54" (1372mm)	18" (457mm)
48" Urinal Screen	18" (457mm)	36" (914mm)	54" (1372mm)	12" (305mm)

11a Urinal Screens with Continuous Stainless Steel Brackets (Optional)

- Before installing the urinal screen components, determine the correct location for you application.
- Brackets are used as templates, but since the hole patterns may be different, the brackets may not be interchangeable.

A Draw a plumb line on the wall to represent the urinal screen centerline. Measure from the highest point in the room and place a mark on the urinal screen centerline at dimension "A" for the respective urinal screen height (see table below).


B Place the bottom of the bracket on the mark and center the opening on the urinal screen centerline. Using the bracket as a template, mark the hole locations on the wall. Remove the bracket and drill a $\text{Ø}5/16"$ hole (minimum 2" [51mm] deep) at each hole location.

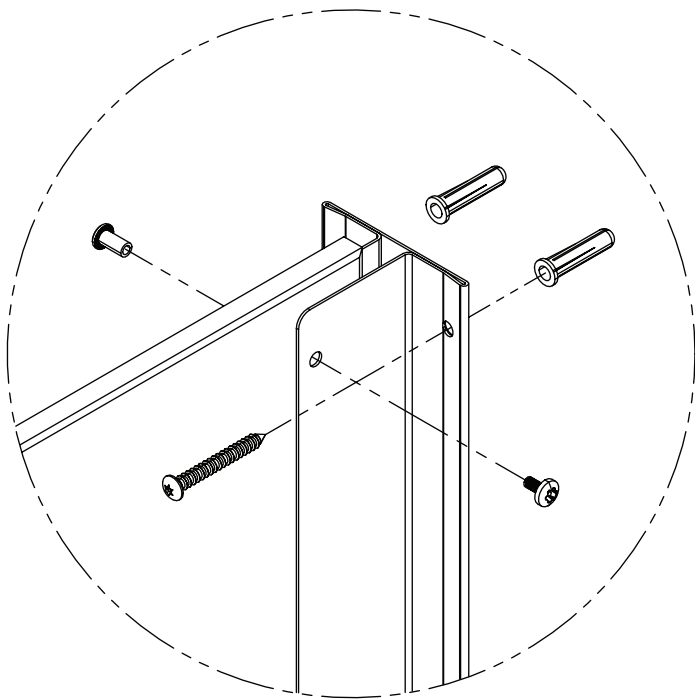

C Insert plastic anchors in all holes and secure bracket to the wall with the #14 x 2" screws provided.

D Place the urinal screen at dimension "B" for the respective urinal screen height (see table on right) and insert it into the wall bracket until a 1" (25mm) gap between the wall and urinal screen is established.

E Using the bracket as a template, drill $\text{Ø}1/4"$ holes through the urinal screen at each bracket hole. Secure the urinal screen to the bracket with the #10-24 x 1/2" barrel nuts and #10-24 x 3/8" machine screws provided.

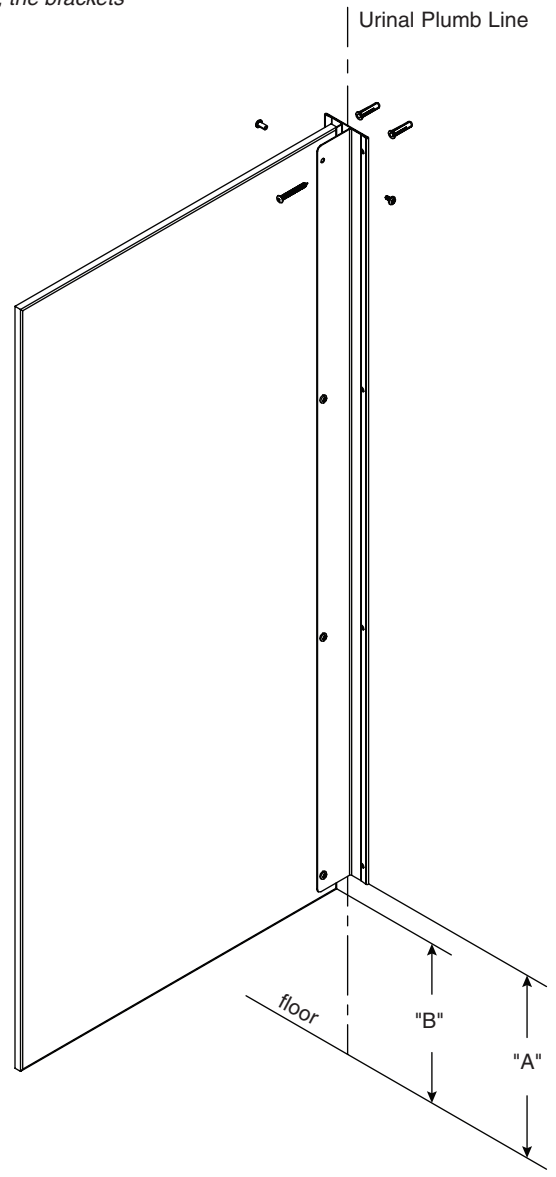


	Dim "A"	Dim "B"
42" Urinal Screen	18-1/2" (470mm)	18" (457mm)
48" Urinal Screen	12-1/2" (318mm)	12" (305mm)

11b Urinal Screens with Continuous Aluminum Brackets (Optional)

- Before installing the urinal screen components, determine the correct location for you application
- Brackets are used as templates, but since the hole patterns may be different, the brackets may not be interchangeable.

A Draw a plumb line on the wall to represent the urinal screen centerline. Measure from the highest point in the room and place a mark on the urinal screen centerline at dimension "A" for the respective urinal screen height (see table below).


B Place the bottom of the bracket on the mark and center the opening on the urinal screen centerline. Using the bracket as a template, mark the hole locations on the wall. Remove the bracket and drill a Ø5/16" hole (minimum 2" [51mm] deep) at each hole location.

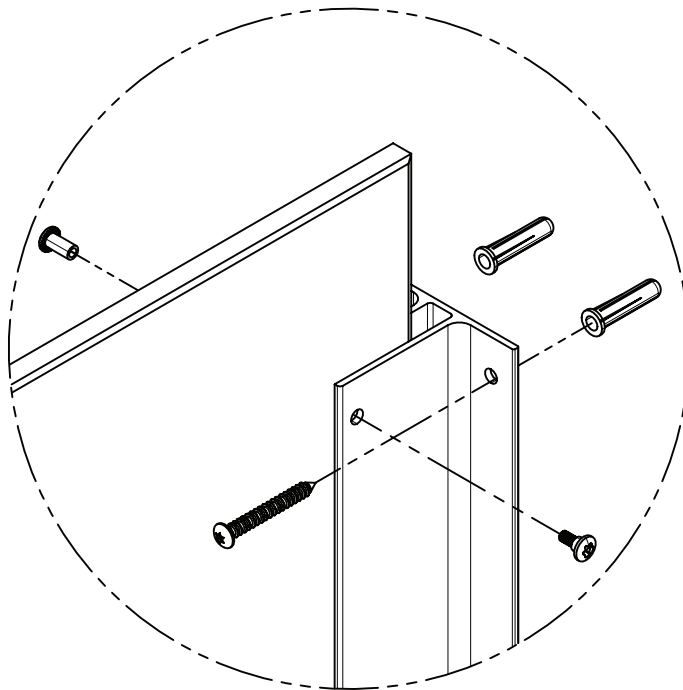

C Insert plastic anchors in all holes and secure bracket to the wall with the #14 x 2" screws provided.

D Place the urinal screen at dimension "B" for the respective urinal screen height (see table on right) and insert it into the wall bracket until a 1" (25mm) gap between the wall and urinal screen is established.

E Using the bracket as a template, drill Ø1/4" holes through the urinal screen at each bracket hole. Secure the urinal screen to the bracket with the #10-24 x 1/2" barrel nuts and #10-24 x 1/2" shoulder screws provided.

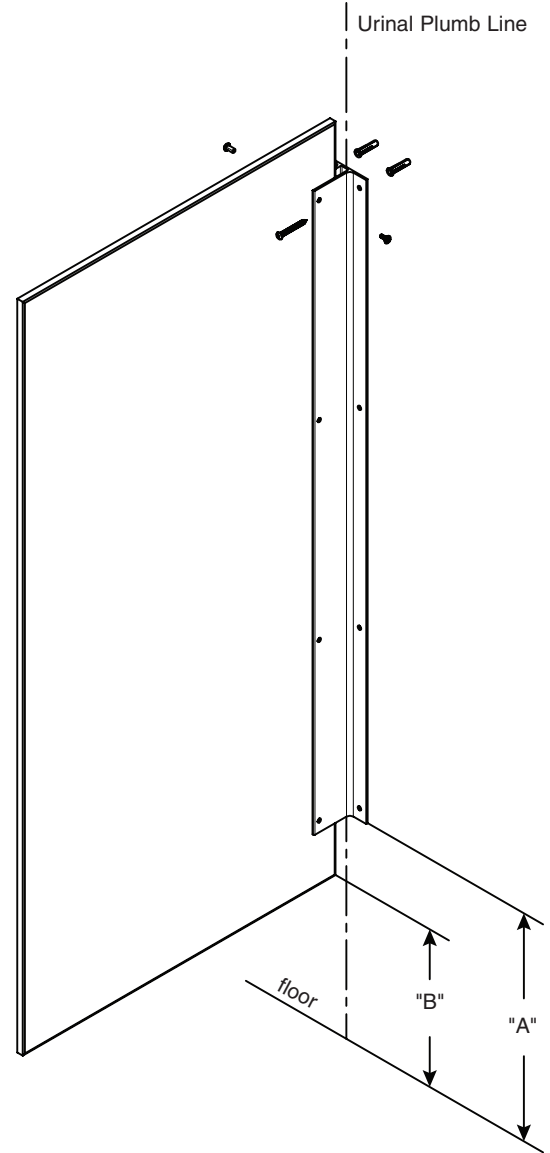

	Dim "A"	Dim "B"
42" Urinal Screen	18-1/4" (464mm)	18" (457mm)
48" Urinal Screen	15-1/4" (387mm)	12" (305mm)